

DEPENDENT RESURVEY OF A PORTION OF THE SOUTH BOUNDARY,
T. 13 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Beginning at the corner of sections 31 and 32 on the south boundary of the Tp., monumented with a quartzite, 10x8x6 ins., marked with notches, 5 on the east and 1 on the west edges, set in a mound of stone; a rebar, 1/2 in. diam., with plastic cap marked: RLS 6464, is set alongside the marked stone.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diameter, 24 ins. in the ground, in a collar of stone, with aluminum cap marked:

T13S R1W
S31 | S32
S6
T14S R1W
1992

Deposit the marked stone alongside and the rebar inside the aluminum post.

Corner is located at the corner of fences projecting north and east.

From this corner National Geodetic Survey Triangulation station "CEDAR" bears S. 74° 03.0' E., 103.09 chs. dist.

S. 89° 10' W., between sections 6 and 31.

20.185 Point for the E 1/16 section corner of section 31 only; not monumented.

40.37 Point for the 1/4 section corner of section 31 only at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diameter, 24 ins. in the ground, in a collar of stone, with aluminum cap marked:

T13S R1W
1/4 S31
T14S R1W
1992

Corner is located at the north edge of a cultivated field.

80.70 The corner of sections 31 and 36, T. 13 S., Rs. 1 and 2 W., monumented with a quartzite, 20x10x6 ins., marked with 6 notches on the north, east and west edges, set in a mound of stone.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diameter, 20 ins. in the ground, in a mound of stone 4 ft. base, with aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SOUTH BOUNDARY,
T. 13 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

T13S
R2W R1W
S36 | S31
S6
T14S
1992

Deposit the marked stone alongside the aluminum post.

Corner is located at the corner of fences projecting north and east.

Dependent Resurvey of a Portion of the West Boundary,
T. 13 S., R. 1 W., Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by E.W. Koeber in 1884

N. 0° 06' E., between sections 31 and 36.

40.20

Point for the 1/4 section corner of sections 31 and 36 at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diameter, 24 ins. in the ground, with aluminum cap marked:

T13S
R2W R1W
1/4
S36 | S31
1992

Raise a mound of stone west of the corner.

Corner is located 30 lks. south of a fence which bears east and west and 30 lks. west of the corner of fences projecting north, south and east.

From this corner a rebar, 1/2 in. diam., with aluminum cap marked: T13S R1W R2W 1/4 S31 S36 RLS 6464, set at the corner of fences projecting north, south and east, bears East, 30 lks. dist.; this fence corner is not accepted as evidence of the original corner.

80.40

Point for the corner of sections 25, 30, 31, and 36 at proportionate distance there is no remaining evidence of the original corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diameter, 10 ins. in the ground to bedrock, and in a mound of stone 4 ft. base, with aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY,
T. 13 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

T13S
R2W R1W
S25 | S30
S36 | S31
1992

From this corner a rebar, 1/2 in. diam., with aluminum cap marked: T13S R1W R2W S25 S30 S31 S36 RLS 6464, bears S. 75° E., 30 lks. dist.; this point is not accepted as the correct proportionate position.

N. 0° 06' E., between sections 25 and 30.

40.20

The 1/4 section corner of sections 25 and 30, monumented with a sandstone, 17x7x7 ins., marked 1/4 on the west face, set in a mound of stone.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diameter, 12 ins. in the ground to bedrock, and in a mound of stone 4 ft. base, with aluminum cap marked:

T13S
R2W R1W
1/4
S25 | S30
1992

Deposit the marked stone alongside the aluminum post.

From this corner a rebar, 1/2 in. diam., with aluminum cap marked: T13S R1W R2W 1/4 S25 S30 RLS 6464, bears S. 50° E., 30 lks. dist.

N. 0° 20' E., beginning new measurement.

39.92

The corner of sections 19, 24, 25, and 30, monumented with a limestone, 13x13x6 ins., marked with notches, 4 on the north and 2 on the south edges; a rebar, 1/2 in. diam., with aluminum cap marked: T13S R1W R2W S19 S24 S25 S30 RLS 6464, is set alongside the marked stone.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diameter, 24 ins. in the ground, with aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY,
T. 13 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

T13S
R2W R1W
S24 | S19
S25 | S30
1992

Deposit the marked stone alongside and the rebar inside the aluminum post.

Raise a mound of stone west of the corner.

N. 0° 09' E., between sections 19 and 24.

40.21 The 1/4 section corner of sections 19 and 24, monumented with a trachyte, 8x6x5 ins., marked 1/4 on the north face.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diameter, 18 ins. in the ground to bedrock, and in a mound of stone 4 ft. base, with aluminum cap marked:

T13S
R2W R1W
1/4
S24 | S19
1992

Deposit the marked stone alongside the aluminum post.

N. 0° 15' W., beginning new measurement.

40.18 The corner of sections 13, 18, 19, and 24, monumented with a sandstone, 16x8x6 ins., marked with 3 notches on the north and south edges, set in a mound of stone; a rebar, 1/2 in. diam., is set alongside the marked stone.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diameter, 18 ins. in the ground to bedrock, and in a mound of stone 4 ft. base, with aluminum cap marked:

T13S
R2W R1W
S13 | S18
S24 | S19
1991

Deposit the marked stone alongside and the rebar inside the aluminum post.

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY,
T. 13 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Corner is located in a fence which bears east and west.

N. 0° 04' E., between sections 13 and 18.

20.09

Point for the S 1/16 section corner of sections 13 and 18.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diameter, 24 ins. in the ground, with aluminum cap marked:

S 1/16
S13 | S18
1991

40.18

Point for the 1/4 section corner of sections 13 and 18 at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diameter, 24 ins. in the ground, in a collar of stone, with aluminum cap marked:

T13S
R2W R1W
1/4
S13 | S18
1991

Deposit a magnet at base of the aluminum post.

Corner is located in a cultivated field.

80.36

The corner of sections 7, 12, 13, and 18, monumented with a limestone, 16x12x10 ins., marked with notches, 2 on the north and 4 on the south edges, set in a mound of stone; a rebar, 1/2 in. diam., is set alongside the marked stone.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diameter, 24 ins. in the ground, in a collar of stone, with aluminum cap marked:

T13S
R2W R1W
S12 | S7
S13 | S18
1991

Deposit the marked stone alongside and the rebar inside the aluminum post.

Corner is located at the north edge of a cultivated field.

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY,
T. 13 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

N. $0^{\circ} 12' W.$, between sections 7 and 12.

40.54

The $1/4$ section corner of sections 7 and 12, monumented with a limestone, 12x12x6 ins., marked $1/4$ on the west face, set in a mound of stone.

At the corner point

Set an aluminum post, 30 ins. long, 2 $1/2$ ins. diameter, 24 ins. in the ground, with aluminum cap marked:

T13S
R2W R1W
 $1/4$
S12 | S7
1991

Deposit the marked stone alongside the aluminum post.

Raise a mound of stone west of the corner.

Dependent Resurvey of a Portion of the North Boundary,
T. 13 S., R. 1 W., Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by A.J. Stewart in 1878
and the Resurveys Executed by E.W. Koeber in 1884
and Thoma and Miller in 1920-21

From the SW corner of section 33 only on the north boundary of the Tp., monumented with an iron post, 2 ins. diam., set in a mound of stone, with brass cap marked as described in the official record of the 1920-21 resurvey.

S. $11^{\circ} 03' E.$, between sections 4 and 32.

2.11

The corner of sections 4 and 32, monumented with a quartzite, 24x8x6 marked with notches, 4 on the east and 2 on the west edges, set in a mound of stone.

from which

A juniper, 6 ins. diam., bears S. $57^{\circ} W.$, 35 lks. dist., with scribe marks visible in a partly healed blaze.

A juniper, 6 ins. diam., bears N. $71^{\circ} W.$, 25 lks. dist., with scribe marks visible in a partly healed blaze.

At the corner point

DEPENDENT RESURVEY OF A PORTION OF THE NORTH BOUNDARY,
T. 13 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Set an aluminum post, 30 ins. long, 2 1/2 ins. diameter, 24 ins. in the ground, in a collar of stone, with aluminum cap marked:

T12S T1W	
S32	
<hr/>	
S4	
T13S R1W	
1991	

Deposit the marked stone alongside the aluminum post.

N. 73° 39' W., beginning new measurement.

7.36

The corner of sections 4 and 5, monumented with a quartzite, 18x12x8 ins., marked with notches, 4 on the west and 2 on the east edges.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diameter, 24 ins. in the ground, with aluminum cap marked:

T12S R1W	
S32	
<hr/>	
S5	S4
T13S R1W	
1991	

Deposit the marked stone alongside the aluminum post.

Raise a mound of stone west of the corner.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 13 S., R. 1 W., Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by E.W. Koeber in 1884

From the corner of sections 28, 29, 32, and 33, monumented with a limestone, 14x10x10 ins., marked with notches, 2 on the south and 4 on the east edges, set in a mound of stone.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diameter, 18 ins. in the ground to bedrock, and in a collar of stone, with aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 13 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

T13S R1W

S29	S28
S32	S33

 1992

Deposit the marked stone alongside the aluminum post.

Raise a mound of stone west of the corner.

Corner is located at the corner of fences projecting south and west.

N. 1° 35' W., between sections 28 and 29.

40.82

The 1/4 section corner of sections 28 and 29, monumented with a trachyte, 10x10x6 ins., marked 1/4 on the west face, and a mound of stone west of the corner.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diameter, 18 ins. in the ground to bedrock, and in a mound of stone 4 ft. base, with aluminum cap marked:

T13S R1W
 1/4

S29	S28
-----	-----

 1992

Deposit the marked stone alongside the aluminum post.

N. 0° 38' W., beginning new measurement.

39.79

The corner of sections 20, 21, 28, and 29, monumented with a quartzite 14x10x5 ins., marked with notches, 2 on the south and 4 on the east edges.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diameter, 12 ins. in the ground to bedrock, and in a mound of stone 5 ft. base, with aluminum cap marked:

T13S R1W

S20	S21
S29	S28

 1992

Deposit the marked stone alongside the aluminum post.

N. 0° 43' W., between sections 20 and 21.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 13 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS
40.10

The 1/4 section corner of sections 20 and 21, monumented with a quartzite, 12x6x6 ins., marked 1/4 on the west face.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diameter, 20 ins. in the ground, in a collar of stone, with aluminum cap marked:

T13S R1W
1/4
S20 | S21
1992

Deposit the marked stone alongside the aluminum post.

N. 1° 11' E., beginning new measurement.

20.02

Point for the N 1/16 section corner of sections 20 and 21.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diameter, 18 ins. in the ground to bedrock, and in a mound of stone 3 ft. base, with aluminum cap marked:

N 1/16
S20 | S21
1992

Corner is located at the north edge of a wash which drains northeast.

40.04

The corner of sections 16, 17, 20 and 21, monumented with a rebar, 1/2 in. diam., with aluminum cap marked: T13S R1W S16 S17 S20 S21 RLS 6464; this is accepted as a careful and faithful reestablishment of the corner position.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diameter, 18 ins. in the ground, in a collar of stone, with aluminum cap marked:

T13S R1W
S17 | S16
S20 | S21
1992

Deposit the rebar inside the aluminum post.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 13 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

From the 1/4 section corner of sections 16 and 21, monumented with a quartzite, 10x10x8 ins., marked 1/4 on the north face, set in a collar of stone; a rebar, 1/2 in. diam., with aluminum cap marked: T13S R1W 1/4 S16 S21 RLS 6464, is set alongside the marked stone.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diameter, 24 ins. in the ground, in a collar of stone, with aluminum cap marked:

T13S R1W
1/4 S16
 S21
 1992

Deposit the marked stone alongside and the rebar inside the aluminum post.

Corner is located 40 lks. south of a fence which bears east and west.

S. 89° 48' W., between sections 16 and 21.

20.58

Point for the W 1/16 section corner of sections 16 and 21.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diameter, 24 ins. in the ground, with aluminum cap marked:

W 1/16 S16
 S21
 1992

Raise a mound of stone north of the corner.

Corner is located 30 lks. south of an abandoned fence which bears east and west.

41.16

The corner of sections 16, 17, 20, and 21.

N. 2° 25' W., between sections 16 and 17.

40.21

The 1/4 section corner of sections 16 and 17, monumented with a trachyte, 11x9x4 ins., no marks visible, set in a collar of stone; a rebar, 1/2 in. diam., with aluminum cap marked: T13S R1W 1/4 S16 S17 RLS 6464, is set alongside the stone monument.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diameter, 24 ins. in the ground, with aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 13 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

T13S R1W
1/4
S17 | S16
1992

Deposit the stone monument alongside and the rebar inside the aluminum post.

Raise a mound of stone west of the corner.

N. 0° 14' W., beginning new measurement.

20.55 Point for the N 1/16 section corner of sections 16 and 17; not monumented.

41.10 The corner of sections 8, 9, 16, and 17, monumented with a limestone, 20x10x6 ins., marked with notches, 4 on the south and 3 on the east edges, set in a mound of stone; a rebar, 1/2 in. diam., with aluminum cap marked: T13S R1W S8 S9 S16 S17 RLS 6464, is set alongside the marked stone.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diameter, 24 ins. in the ground, with aluminum cap marked:

T13S R1W
S8 | S9
S17 | S16
1991

Deposit the marked stone alongside and the rebar inside the aluminum post.

Raise a mound of stone west of the corner.

N. 1° 06' W., between sections 8 and 9.

40.73 Point for the 1/4 section corner of sections 8 and 9 at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diameter, 24 ins. in the ground, with aluminum cap marked:

T13S R1W
1/4
S8 | S9
1991

Raise a mound of stone west of the corner.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 13 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS
81.46

The corner of sections 4, 5, 8, and 9, monumented with a limestone, 24x20x16 ins., marked with notches, 5 on the south and 3 on the east edges; a rebar, 1/2 in. diam., with plastic cap marked: RLS 6464, is set alongside the marked stone.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diameter, 24 ins. in the ground, in a mound of stone 3 ft. base, with aluminum cap marked:

T13S R1W	
S5	S4
S8	S9
1991	

Deposit the marked stone alongside and the rebar inside the aluminum post.

Corner is located at the end of a fence which projects west.

N. 0° 33' E., between sections 4 and 5.

39.03

Point for the 1/4 section corner of sections 4 and 5, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diameter, 24 ins. in the ground, with aluminum cap marked:

T13S R1W	
1/4	
S5	S4
1991	

Raise a mound of stone west of the corner.

76.11

The corner of sections 4 and 5 on the north boundary of the Tp., hereinbefore described.

From the corner of sections 31 and 32 on the south boundary of the Tp., hereinbefore described.

N. 1° 52' W., between sections 31 and 32.

19.935

Point for the S 1/16 section corner of sections 31 and 32.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, in a collar of stone, with aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 13 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

S 1/16
S31 | S32
1992

Corner is located 50 lks. west of a fence which bears north and south.

39.87

The 1/4 section corner of sections 31 and 32, monumented with a quartzite, 12x10x5 ins., marked 1/4 on the west face.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

T13S R1W
1/4
S31 | S32
1992

Deposit the marked stone alongside the aluminum post.

Raise a mound of stone west of the corner.

Corner is located 50 lks. west of a fence which bears north and south.

N. 0° 48' W., beginning new measurement.

40.58

The corner of sections 29, 30, 31, and 32, monumented with a quartzite, 24x10x10 ins., marked with notches, 1 on the south and 5 on the east edges.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

T13S R1W
S30 | S29
S31 | S32
1992

Deposit the marked stone alongside the aluminum post.

Raise a mound of stone west of the corner.

Corner is located at the corner of fences projecting east and northwest.

From the corner of sections 28, 29, 32, and 33.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 13 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

S. $89^{\circ} 38'$ W., between sections 29 and 32.

40.47

The 1/4 section corner of sections 29 and 32, monumented with a quartzite, 18x14x8 ins., marked 1/4 on the north face.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, in a collar of stone, with aluminum cap marked:

T13S R1W
1/4 $\frac{S29}{S32}$
1992

Deposit the marked stone alongside the aluminum post.

Corner is located 2 lks. south of a fence which bears east and west.

S. $88^{\circ} 42'$ W., beginning new measurement.

40.18

The corner of sections 29, 30, 31, and 32.

N. $89^{\circ} 54'$ W., between sections 30 and 31.

39.53

The 1/4 section corner of sections 30 and 31, monumented with a quartzite, 15x6x4 ins., marked 1/4 on the north face, set in a mound of stone.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

T13S R1W
1/4 $\frac{S30}{S31}$
1992

Deposit the marked stone alongside the aluminum post.

Raise a mound of stone north of the corner.

S. $88^{\circ} 10'$ W., beginning new measurement.

39.16

The corner of sections 25, 30, 31, and 36 on the west boundary of the Tp., hereinbefore described.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 13 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

From the corner of sections 29, 30, 31, and 32.

N. $1^{\circ} 01'$ W., between sections 29 and 30.

40.38

The 1/4 section corner of sections 29 and 30, monumented with a trachyte, 14x14x8 ins., marked 1/4 on the west face, set in a mound of stone.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

T13S R1W
1/4
S30 | S29
1992

Deposit the marked stone alongside the aluminum post.

Raise a mound of stone west of the corner.

N. $1^{\circ} 01'$ W., beginning new measurement.

40.38

The corner of sections 19, 20, 29, and 30, monumented with a quartzite, 16x12x7 ins., marked with notches, 2 on the south and 5 on the east edges, set in a mound of stone.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 18 ins. in the ground to bedrock, and in a mound of stone 4 ft. base, with aluminum cap marked:

T13S R1W
S19 | S20
S30 | S29
1992

Deposit the marked stone alongside the aluminum post.

From the corner of sections 20, 21, 28, and 29.

S. $89^{\circ} 18'$ W., between sections 20 and 29.

40.27

The 1/4 section corner of sections 20 and 29, monumented with a quartzite, 24x16x10 ins., marked 1/4 on the north face.

At the corner point

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 13 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, in a collar of stone, with aluminum cap marked:

	T13S R1W
1/4	<u>S20</u>
	S29
	1992

Deposit the marked stone alongside the aluminum post.

Raise a mound of stone north of the corner.

S. 89° 15' W., beginning new measurement.

40.23 The corner of sections 19, 20, 29, and 30.

S. 88° 33' W., between sections 19 and 30.

40.39 The 1/4 section corner of sections 19 and 30, monumented with a sandstone, 10x8x4 ins., marked 1/4 on the north face.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 16 ins. in the ground, in a mound of stone 4 ft. base, with aluminum cap marked:

	T13S R1W
1/4	<u>S19</u>
	S30
	1992

Deposit the marked stone alongside the aluminum post.

S. 88° 46' W., beginning new measurement.

36.56 The corner of sections 19, 24, 25, and 30 on the west boundary of the Tp., hereinbefore described.

From the corner of sections 19, 20, 29, and 30.

N. 0° 51' W., between sections 19 and 20.

39.67 Point for the 1/4 section corner of sections 19 and 20 at proportionate distance; there is no remaining evidence of the original corner.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 13 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 18 ins. in the ground to bedrock, and in a mound of stone 4 ft. base, with aluminum cap marked:

T13S R1W
1/4
S19 | S20
1992

- 79.34** The corner of sections 17, 18, 19, and 20, monumented with a rebar, 1/2 in. diam., set at the corner of fences projecting west and northeast; this is accepted as a careful and faithful reestablishment of the corner position.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

T13S R1W
S18 | S17
S19 | S20
1992

Deposit the rebar inside the aluminum post.

Raise a mound of stone west of the corner.

From the corner of sections 16, 17, 20, and 21.

S. 88° 44' W., between sections 17 and 20.

- 20.50** Point for the E 1/16 section corner of sections 17 and 20.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, in a collar of stone, with aluminum cap marked:

E 1/16 S17
 S20
 1992

- 41.00** The 1/4 section corner of sections 17 and 20 monumented with rebar, 1/2 in. diam., with plastic cap marked: RLS 6464, set in a mound of stone; this is accepted as a careful and faithful reestablishment of the corner position.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 13 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

T13S R1W

1/4 $\frac{S17}{S20}$
1992

Deposit rebar inside the aluminum post.

Raise a mound of stone north of the corner.

S. $88^{\circ} 44'$ W., beginning new measurement.

41.00 The corner of sections 17, 18, 19, and 20.

N. $88^{\circ} 26'$ W., between sections 18 and 19.

20.39 Point for the E 1/16 section corner of sections 18 and 19.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

E 1/16 $\frac{S18}{S19}$
1992

Corner is located 40 lks. north of a fence which bears east and west.

40.78 The 1/4 section corner of sections 18 and 19, monumented with a trachyte, 12x10x10 ins., marked 1/4 on the north face, set in a mound of stone.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

T13S R1W
1/4 $\frac{S18}{S19}$
1992

Deposit the marked stone alongside the aluminum post.

Raise a mound of stone north of the corner.

Corner is located 180 lks. north of a fence which bears east and west.

From this corner a rebar, 1/2 in. diam., with plastic cap marked: RLS 6464, bears S. $30^{\circ} 12'$ W., 1.76 chs. dist.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 13 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

S. $86^{\circ} 58'$ W., beginning new measurement.

35.07

The corner of sections 13, 18, 19, and 24 on the west boundary of the Tp., hereinbefore described.

From the corner of sections 17, 18, 19, and 20.

N. $0^{\circ} 48'$ W., between sections 17 and 18.

20.05

Point for the S $1/16$ section corner of sections 17 and 18.

Set an aluminum post, 30 ins. long, 2 $1/2$ ins. diam., 24 ins. in the ground, in a collar of stone, with aluminum cap marked:

S $1/16$
S18 | S17
1992

Corner is located approximately 3 chs. south of the corner of fences projecting north and east.

40.10

The $1/4$ section corner of sections 17 and 18, monumented with a rebar, $1/2$ in. diam., with plastic cap marked: RLS 6464; this is accepted as a careful and faithful reestablishment of the corner position.

At the corner point

Set an aluminum post, 30 ins. long, 2 $1/2$ ins. diam., 24 ins. in the ground, with aluminum cap marked:

T13S R1W
 $1/4$
S18 | S17
1992

Deposit the rebar inside the aluminum post.

Corner is located 113 lks. north of the corner of fences projecting north, south and west.

From the corner of sections 8, 9, 16, and 17.

S. $87^{\circ} 58'$ W., between sections 8 and 17.

20.29

Point for the E $1/16$ section corner of sections 8 and 17.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 13 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

E 1/16 $\frac{S8}{S17}$
1992

40.58

The 1/4 section corner of sections 8 and 17, monumented with a rebar, 1/2 in. diam., with plastic cap marked: RLS 6464, set 1 ft. below the surface of the ground in a cultivated field; this is accepted as a careful and faithful reestablishment of the corner position.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

T13S R1W
1/4 $\frac{S8}{S17}$
1992

Deposit the rebar inside the aluminum post.

From the corner of sections 7, 8, 17, and 18, monumented with an aluminum rod, 3/4 in. diam., projecting 6 ins. above the ground, with Juab County Survey aluminum cap marked: T13S R1W S7 S8 S17 S18; this is accepted as a careful and faithful reestablishment of the corner position.

Corner is located in a fence which bears north and south.

N. 86° 19' W., between sections 7 and 18.

20.33

Point for the E 1/16 section corner of sections 7 and 18.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

E 1/16 $\frac{S7}{S18}$
1992

Corner is located 15 lks. east of a fence which bears north and south.

40.66

The 1/4 section corner of sections 7 and 18, monumented with a sandstone, 16x10x8 ins., marked 1/4 on the north face, set in a mound of stone.

At the corner point

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 13 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

T13S R1W
1/4 $\frac{S7}{S18}$
1992

Deposit the marked stone alongside the aluminum post.

Raise a mound of stone north of the corner.

From this corner a rebar, 1/2 in. diam., with plastic cap marked: RLS 6464, bears S. 12° W., 3.05 chs. dist.

S. 84° 40' W., beginning new measurement.

21.02 Point for the W 1/16 section corner of sections 7 and 18.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

W 1/16 $\frac{S7}{S18}$
1992

34.26 The corner of sections 7, 12, 13, and 18, on the west boundary of the Tp., hereinbefore described.

From the 1/4 section corner of sections 7 and 8, monumented with an aluminum rod, 3/4 in. diam., projecting 6 ins., above the ground, with Juab County Survey aluminum cap marked: T13S R1W 1/4 S7 S8; this is accepted as a careful and faithful reestablishment of the corner position. No improvements were made to this monument.

Corner is located at the corner of fences projecting north, south and west.

N. 0° 39' W., between sections 7 and 8.

40.12 Point for the corner of sections 5, 6, 7, and 8, determined latitudinally at proportionate distance and longitudinally in line with a N-S fence line, S of State Highway No. 132, projecting S.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 13 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

T13S R1W

S6	S5
S7	S8
1992	

Corner is located at the west edge of a road which bears north and south, and 50 lks. west of N-S fence line.

From this corner the corner of sections 5 and 6 on the north boundary of the Tp., bears N. $0^{\circ} 37' W.$, 76.33 chs. dist.; this control line was retraced and the intervening 1/4 section corner searched for but not found.

The corner of sections 5 and 6 is monumented with a concrete post, 10 ins. diam., set in a collar of stone, marked: 6 + 5. This is accepted as a careful and faithful remonumentation of the original corner. A trachyte, 9x8x7 ins, marked with notches, 5 and 1 on opposite edges, is set alongside the concrete post.

Corner is located at the corner of fences projecting south, east and west.

From this corner a rebar, 1/2 in. diam., with plastic cap marked: RLS 6464, bears South, 6 lks. dist.

From the corner of sections 4, 5, 8, and 9.

S. $87^{\circ} 03' W.$, between sections 5 and 8.

20.135 Point for the E 1/16 section corner of sections 5 and 8.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

E 1/16	S5
	S8
	1992

Corner is located 50 lks. north of the corner of fences projecting north, south and east.

40.27 Point for the 1/4 section corner of sections 5 and 8 at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

1/4	T13S R1W
	S5
	S8
	1992

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 13 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS
80.54

The corner of sections 5, 6, 7, and 8.

S. 89° 32' W., between sections 6 and 7.

40.60

Point for the 1/4 section corner of sections 6 and 7 at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

T13S R1W
1/4 $\frac{S6}{S7}$
1992

73.97

The corner of sections 1, 6, 7, and 12 on the west boundary of the Tp., monumented with a trachyte, 12x10x6 ins., marked with grooves, 1 on the north and 5 on the south faces; a rebar, 5/8 in. diam., is set alongside the marked stone.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

T13S
R2W R1W
 $\frac{S1}{S12} \mid \frac{S6}{S7}$
1992

Deposit the marked stone alongside and the rebar inside the aluminum post.

Corner is located 6 lks. west of a fence which bears north and south.

The Subdivision of Section 7,
T. 13 S., R. 1 W., Salt Lake Meridian, Utah

From the 1/4 section corner of sections 7 and 18.

N. 0° 42' W., on the N-S center line of section 7.

37.42

Point for the center 1/4 section corner at intersection with the E-W center line.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

THE SUBDIVISION OF SECTION 7,
T. 13 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

T13S R1W
C 1/4 S7
1992

Corner is located in a cultivated field.

77.27 The 1/4 section corner of sections 6 and 7.

From the 1/4 section corner of sections 7 and 8.

S. $89^{\circ} 55'$ W., on the E-W center line of section 7.

20.29 Point for the center E 1/16 section corner falls at the center of a road which bears north and south.

Set a railroad spike flush with the surface of the road.

from which

An aluminum post, 30 ins. long, 2 1/2 ins. diam., set 24 ins. in the ground, for a reference monument, with aluminum cap marked: CE 1/16 S7 16.5FT and an arrow pointing to the corner, bears S. $45^{\circ} 05'$ E., 25 lks. dist.

An aluminum post, 30 ins. long, 2 1/2 ins. diam., set 24 ins. in the ground, for a reference monument, with aluminum cap marked: CE 1/16 S7 16.5FT and an arrow pointing to the corner, bears S. $44^{\circ} 55'$ W., 25 lks. dist.

40.58 The center 1/4 section corner.

74.38 The 1/4 section corner of sections 7 and 12 on the west boundary of the Tp., hereinbefore described.

From the E 1/16 section corner of sections 7 and 18.

N. $0^{\circ} 40'$ W., on the N-S center line of the SE 1/4 of section 7.

38.75 The center E 1/16 section corner.

The Subdivision of Section 8,
T. 13 S., R. 1 W., Salt Lake Meridian, Utah

From the 1/4 section corner of sections 8 and 17.

THE SUBDIVISION OF SECTION 8,
T. 13 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

N. $0^{\circ} 53'$ W., on the N-S center line of section 8.

40.41

Point for the center $1/4$ section corner at intersection with the E-W center line.

Set an aluminum post, 30 ins. long, 2 $1/2$ ins. diam., 24 ins. in the ground, with aluminum cap marked:

T13S R1W
C $1/4$ S8
1992

80.84

The $1/4$ section corner of sections 5 and 8.

From the $1/4$ section corner of sections 8 and 9.

S. $87^{\circ} 30'$ W., on the E-W center line of section 8.

20.21

Point for the center E $1/16$ section corner.

Set an aluminum post, 30 ins. long, 2 $1/2$ ins. diam., 24 ins. in the ground, with aluminum cap marked:

C $\frac{E\ 1/16}{S8}$ C
1992

Raise a mound of stone north of the corner.

Corner is located approximately 1 ch. east of a fence which bears north and south.

40.42

The center $1/4$ section corner.

80.84

The $1/4$ section corner of sections 7 and 8.

From the center E $1/16$ section corner.

N. $1^{\circ} 00'$ W., on the N-S center line of the NE $1/4$.

40.58

The E $1/16$ section corner of sections 5 and 8.

From the E $1/16$ section corner of sections 8 and 17.

N. $1^{\circ} 00'$ W., on the N-S center line of the SE $1/4$ of section 8.

40.57

The center E $1/16$ section corner.

THE SUBDIVISION OF SECTION 17,
T. 13 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

The Subdivision of Section 17,
T. 13 S., R. 1 W., Salt Lake Meridian, Utah

From the 1/4 section corner of sections 17 and 20.

N. 1° 01' W., on the N-S center line of section 17.

20.075 Point for the center S 1/16 section corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, in a mound of stone 3 ft. base, with aluminum cap marked:

C
S 1/16 | S17
C
1992

40.15 Point for the center 1/4 section corner at intersection with the E-W center line.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

T13S R1W
C 1/4 S17
1992

60.445 Point for the center N 1/16 section corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

C
N 1/16 | S17
C
1992

Corner is located 125 lks. south and 50 lks. east of the corner of fences projecting south and east.

80.74 The 1/4 section corner of sections 8 and 17.

From the 1/4 section corner of sections 16 and 17.

S. 88° 40' W., on the E-W center line of section 17.

20.005 Point for the center E 1/16 section corner; not monumented.

THE SUBDIVISION OF SECTION 17,
T. 13 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS**40.01**

The center 1/4 section corner.

80.85

The 1/4 section corner of sections 17 and 18.

 From the point for the center E 1/16 section corner.
N. $0^{\circ} 38'$ W., on the N-S center line of the NE 1/4.**20.42**

Point for the NE 1/16 section corner at intersection with the E-W center line of the NE 1/4.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 18 ins. in the ground to bedrock, and in a mound of stone 3 ft. base, with aluminum cap marked:

NE 1/16 S17
1992

40.84

The E 1/16 section corner of sections 8 and 17.

 From the point for the N 1/16 section corner of sections 16 and 17.
S. $88^{\circ} 19'$ W., on the E-W center line of the NE 1/4 of section 17.**20.15**

The NE 1/16 section corner.

40.30

The center N 1/16 section corner.

 From the center S 1/16 section corner.
S. $88^{\circ} 42'$ W., on the E-W center line of the SW 1/4.**40.92**

The S 1/16 section corner of sections 17 and 18.

The Subdivision of Section 18,
T. 13 S., R. 1 W., Salt Lake Meridian, Utah

From the 1/4 section corner of sections 18 and 19.

N. $0^{\circ} 35'$ W., on the N-S center line of section 18.**38.63**

Point for the center 1/4 section corner at intersection with the E-W center line.

THE SUBDIVISION OF SECTION 18,
T. 13 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

T13S R1W
C 1/4 S18
1992

Raise a mound of stone west of the corner.

81.69

The 1/4 section corner of sections 7 and 18.

From the 1/4 section corner of sections 17 and 18.

S. 89° 30' W., on the E-W center line of section 18.

20.30

Point for the center E 1/16 section corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

C $\frac{E\ 1/16}{S18}$ C
1992

40.60

The center 1/4 section corner.

61.77

Point for the center W 1/16 section corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

C $\frac{W\ 1/16}{S18}$ C
1992

75.19

The 1/4 section corner of sections 13 and 18 on the west boundary of the Tp., hereinbefore described.

From the center E 1/16 section corner.

N. 0° 37' W., on the N-S center line of the NE 1/4.

41.58

The E 1/16 section corner of sections 7 and 18.

From the E 1/16 section corner of sections 18 and 19.

THE SUBDIVISION OF SECTION 18,
T. 13 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

- N. $0^{\circ} 41'$ W., on the N-S center line of the SE 1/4 of section 18.
- 39.37** The center E 1/16 section corner.
-
- From the center W 1/16 section corner.
- N. $0^{\circ} 16'$ W., on the N-S center line of the NW 1/4.
- 41.30** The W 1/16 section corner of sections 7 and 18.
-
- The Subdivision of Section 31,
T. 13 S., R. 1 W., Salt Lake Meridian, Utah
-
- From the 1/4 section corner of section 31 only on the south boundary of the Tp.,
hereinbefore described.
- N. $0^{\circ} 44'$ W., on the N-S center line of section 31.
- 20.015** Point for the center S 1/16 section corner; not monumented.
- 40.03** Point for the center 1/4 section corner at intersection with the E-W center line.
- Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, in a
collar of stone, with aluminum cap marked:
- T13S R1W
C 1/4 S31
1992
- Corner is located 80 lks. north of a fence which bears east and west.
- 81.08** The 1/4 section corner of sections 30 and 31.
-
- From the 1/4 section corner of sections 31 and 32.
- S. $89^{\circ} 25'$ W., on the E-W center line of section 31.
- 19.79** Point for the center E 1/16 section corner.
- Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, in a
collar of stone, with aluminum cap marked:

THE SUBDIVISION OF SECTION 31,
T. 13 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

C $\frac{E \ 1/16}{S31}$ C
1992

39.58 The center 1/4 section corner.

63.78 Point for the center W 1/16 section corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, in a mound of stone 4 ft. base., with aluminum cap marked:

C $\frac{W \ 1/16}{S31}$ C
1992

Corner is located 25 lks. north of a fence which bears east and west.

79.32 The 1/4 section corner of sections 31 and 36 on the west boundary of the Tp., hereinbefore described.

From the point for the E 1/16 section corner of section 31 only on the south boundary of the Tp., hereinbefore described.

N. 1° 18' W., on the N-S center line of the SE 1/4 of section 31.

19.975 Point for the SE 1/16 section corner at intersection with the E-W center line of the SE 1/4.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

SE 1/16 S31
1992

Raise a mound of stone west of the corner.

39.95 The center E 1/16 section corner.

From the S 1/16 section corner of sections 31 and 32.

S. 89° 18' W., on the E-W center line of the SE 1/4 of section 31.

19.985 The SE 1/16 section corner.

39.97 The point for the center S 1/16 section corner.

THE SUBDIVISION OF SECTION 31,
T. 13 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

From the center W 1/16 section corner.

N. 0° 16' W., on the N-S center line of the NW 1/4.

40.53

The W 1/16 section corner of sections 30 and 31.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

Name	Capacity
Joseph M. Dhaenens	Surveying Technician
Brandon S. Sanchez	Surveying Technician
Steven J. Oatman	Survey Aid

CERTIFICATE OF SURVEY

I, *Richard A. Zaninovich, Cadastral Surveyor*, hereby certify upon honor that, in pursuance of special instructions bearing the date of the *18th day of September, 1991*, I have *dependently resurveyed portions of the north, south and west boundaries and subdivisional lines, and subdivided sections 7, 8, 17, 18, and 31, in Township 13 South, Range 1 West,*

of the *Salt Lake Meridian*, in the State of *Utah*, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

S-28-94

Date


(Cadastral Surveyor)

Date

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Salt Lake City, Utah


The foregoing field notes of the *dependent resurvey of portions of the north, south and west boundaries and subdivisional lines and the subdivision of sections 7, 8, 17, 18, and 31, Township 13 South, Range 1 West, Salt Lake Meridian, Utah,*

executed by *Richard A. Zaninovich, Cadastral Surveyor*

having been critically examined and found correct, are hereby approved.

August 19, 1994

Date

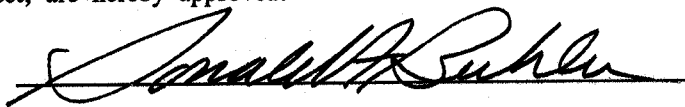
(Chief Cadastral Surveyor, Utah State Office)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF
THE DEPENDENT RESURVEY OF
A PORTION OF THE WEST BOUNDARY,
A PORTION OF THE SUBDIVISIONAL LINES
AND THE
SUBDIVISION OF SECTION 7
IN
TOWNSHIP 14 SOUTH, RANGE 1 WEST

OF THE SALT LAKE MERIDIAN
IN THE STATE OF UTAH

EXECUTED BY

Richard A. Zaninovich
Cadastral Surveyor

Under special instructions dated *November 6, 1991*, approved *November 6, 1991*, which provided for the surveys included under Group Number 779, and assignment instructions dated *November 8, 1991*.

Survey commenced *November 8, 1991*

Survey completed *November 25, 1991*

INDEX DIAGRAM

Township 14 South, Range 1 West

	6	5	4	3	2	1
	7					
2	7 6	8	9	10	11	12
	4					
1	18	17	16	15	14	13
	19	20	21	22	23	24
	30	29	28	27	26	25
	31	32	33	34	35	36

The Survey of the Subdivision of Section 7.....Page 8

TOWNSHIP 14 SOUTH, RANGE 1 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

The following field notes describe the dependent resurvey of a portion of the west boundary and subdivisional lines and the subdivision of section 7, in Township 14 South, Range 1 West, Salt Lake Meridian, Utah.

A portion of the west boundary was surveyed by Ferdinand Dickert in 1871; this portion was resurveyed and the remainder surveyed by Stewart and Stewart in 1898. The entire west boundary was resurveyed by Stewart and Heist in 1912. A portion of the subdivisional lines were surveyed by Charles Mogo in 1856; portions were resurveyed and the subdivision of the township was completed by Stewart and Stewart in 1898.

The survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group No. 779, dated November 6, 1991.

The directions of lines were determined by hour angle observations of the sun and Polaris, carried forward by sustained angulation. Distances were determined by electronic measurement.

Preliminary to the resurvey the lines of the original survey were retraced and a diligent search was made for any evidence of the original field note record. Identified corners were remonumented in their original positions; lost corners were restored and monumented at proportionate positions based on the original record. The retracement data were thoroughly verified and only the true line notes are given herein.

The geographic position of the NE corner of section 12, T. 14 S., R. 2 W., as determined by a tie made to National Geodetic Survey station "CAPPS" is as follows:

Latitude $39^{\circ} 37' 13.74''$ N. Longitude $112^{\circ} 00' 50.12''$ W.
N.A.D. 1927

The mean magnetic declination as projected from the U.S. Geological Survey Magnetic Declination Map of 1985, is 14° E.

Dependent Resurvey of a Portion of the West Boundary,
T. 14 S., R. 1 W., Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by
Stewart and Stewart in 1898 and the Resurvey Executed by
Stewart and Heist in 1912

Beginning at the 1/4 section corner of section 13 only on the west boundary of the Tp., monumented with trachyte, 22x12x8 ins., marked 1/4 on the west face, and a mound of stone west of the corner.

At the corner point

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY,
T. 14 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

T14S
R2W R1W
1/4 |
S13 |
1991

Deposit the marked stone alongside the aluminum post.

Raise a mound of stone west of the corner.

N. 0° 09' W., between sections 13 and 18.

9.01 The closing corner of sections 7 and 18, hereinafter described.

Continue between sections 7 and 13.

29.01 Point for the S 1/16 section corner of section 7 only.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

| S 1/16
| S7
1991

Raise a mound of stone west of the corner.

39.98 Point for the corner of sections 12 and 13 at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, in a collar of stone, with aluminum cap marked:

T14S
R2W R1W
S12 | S7
S13 |
1991

Corner is located 3 lks. west of a fence which bears north and south.

N. 0° 09' W., between sections 7 and 12.

9.03 Point for the 1/4 section corner of section 7 only.

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY,
T. 14 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

T14S
R2W R1W
| 1/4
| S7
1991

Corner is located 10 lks. northeast of the corner of fences projecting north and east.

20.05 Point for the S 1/16 section corner of section 12 only.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, in a collar of stone, with aluminum cap marked:

S 1/16 |
S12 |
1991

Corner is located 15 lks. north of the corner of fences projecting north, south and west.

29.03 Point for the N 1/16 section corner of section 7 only; not monumented.

40.10 The 1/4 section corner of section 12 only, monumented with a sandstone, 16x12x8 ins., (record, quartzite 18x20x6 ins.), marked 1/4 on the west face, and a mound of stone west of the corner.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

T14S
R2W R1W
1/4 |
S12 |
1991

Deposit the marked stone alongside the aluminum post.

Raise a mound of stone west of the corner.

N. 0° 09' W., beginning new measurement.

8.93 The closing corner of sections 6 and 7, hereinafter described.

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY,
T. 14 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Continue between sections 6 and 12.

40.10

The corner of sections 1 and 12, T. 14 S., R. 2 W., monumented with an iron post, 3 ins. diam., projecting 12 ins. above the ground with brass cap marked as described in the official record of the 1912 resurvey.

From this corner National Geodetic Survey station "CAPPS" bears N. $30^{\circ} 29.1' W.$, 267.49 chs. dist.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 14 S., R. 1 W., Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by
Stewart and Stewart in 1898

From the corner of sections 7, 8, 17, and 18, monumented with a quartzite, 18x12x10 ins., (record, 20x14x10 ins.), marked with 4 notches on the south edge, and a mound of stone west of the corner.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

T14S R1W	
S7	S8
S18	S17
1991	

Deposit the marked stone alongside the aluminum post.

Raise a mound of stone west of the corner.

N. $89^{\circ} 58' W.$, between sections 7 and 18.

19.91

Point for the E 1/16 section corner of sections 7 and 18.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, in a collar of stone, with aluminum cap marked:

E 1/16	S7
	S18
	1991

39.82

The 1/4 section corner of sections 7 and 18, monumented with a trachyte, 14x12x6 ins., marked 1/4 on the north face.

At the corner point

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 14 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, in a collar of stone, with aluminum cap marked:

T14S R1W
1/4 $\frac{S7}{S18}$
1991

Deposit the marked stone alongside the aluminum post.

S. 89° 23' W., beginning new measurement.

40.36

Point for the 80 1/16 section corner of sections 7 and 18.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, in a mound of stone 3 ft. base to top of aluminum cap marked:

1/16 $\frac{S7}{S18}$ 80
1991

60.54

Point for the 100 1/16 section corner of sections 7 and 18.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

1/16 $\frac{S7}{S18}$ 100
1991

80.72

Point for the 120 1/16 section corner of sections 7 and 18.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, in a collar of stone, with aluminum cap marked:

1/16 $\frac{S7}{S18}$ 120
1991

100.90

Point for the 140 1/16 section corner of sections 7 and 18.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 14 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

1/16 $\frac{S7}{S18}$ 140
1991

Raise a mound of stone north of the corner.

161.44 Point for the 200 1/16 section corner of sections 7 and 18; not monumented.

165.68 Intersect the west boundary of the Tp. at the closing corner of sections 7 and 18, monumented with a trachyte, 18x10x8 ins., set in a collar of stone, marked with grooves, 2 on the north and 4 on the south, and CC on the east face.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

T14S
R2W R1W
S13 $\frac{S7}{S18}$ CC
1991

Deposit the marked stone alongside the aluminum post.

Raise a mound of stone east of the corner.

From this corner the 1/4 section corner of section 13 only, T. 14 S., R. 2 W., hereinbefore described, bears S. 0° 09' E., 9.01 chs. dist.

From the corner of sections 7, 8, 17, and 18.

N. 0° 15' E., between sections 7 and 8.

19.86 Point for the S 1/16 section corner of sections 7 and 8; not monumented.

39.72 The 1/4 section corner of sections 7 and 8, monumented with a trachyte, 20x20x10 ins., broken in two pieces, no marks visible.

from which

A juniper, 8 ins. diam., bears N. 70° E., 22 lks. dist., with illegible scribe marks visible in an open, weathered blaze (record, 20 lks.).

A juniper, 8 ins. diam., bears S. 60° W., 23 lks. dist., with illegible scribe marks visible in an open, weathered blaze (record, N. 60° W., 21 lks.).

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 14 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, in a collar of stone, with aluminum cap marked:

T14S R1W
1/4
S7 | S8
1991

Deposit stone monument alongside the aluminum post.

N. 2° 05' W., beginning new measurement.

39.22

The corner of sections 5, 6, 7, and 8, monumented with a limestone, 20x8x6 ins., marked with notches, 5 on the south and 5 on the east edges, and a mound of stone west of the corner.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, in a collar of stone, with aluminum cap marked:

T14S R1W
S6 | S5
S7 | S8
1991

Deposit the marked stone alongside the aluminum post.

N. 89° 20' W., between sections 6 and 7.

20.03

Point for the E 1/16 section corner of sections 6 and 7.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top of aluminum cap marked:

E 1/16 $\frac{S6}{S7}$
1991

40.06

The 1/4 section corner of section 6 and 7, monumented with a quartzite, 16x10x8 ins., marked 1/4 on the north face, and a mound of stone north of the corner.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, in a collar of stone, with aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 14 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

T14S R1W
1/4 $\frac{S6}{S7}$
1991

Deposit the marked stone alongside the aluminum post.

S. 89° 36' W., beginning new measurement.

60.105 Point for the 100 1/16 section corner of sections 6 and 7; not monumented.

140.245 Point for the 180 1/16 section corner of sections 6 and 7; not monumented.

164.39 Intersect the west boundary of the Tp. at the closing corner of sections 6 and 7, monumented with a sandstone, 14x12x4 ins., (record, quartzite 16x12x6 ins.) marked with grooves, 1 on the north and 5 on the south faces, and CC on the east face, set in a collar of stone.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with an aluminum cap marked:

T14S
R2W R1W
S12 $\frac{S6}{S7}$ CC
1991

Deposit the marked stone alongside the aluminum post.

From this corner the 1/4 section corner of section 12 only, T. 14 S., R. 2 W., hereinbefore described, bears S. 0° 09' E., 8.93 chs. dist.

The Subdivision of Section 7,
T. 14 S. R. 1 W., Salt Lake Meridian, Utah

From the 1/4 section corner of sections 7 and 18.

N. 1° 05' W., on the N-S center line of section 7.

19.71 Point for the center S 1/16 section corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

THE SUBDIVISION OF SECTION 7,
T. 14 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

C
S 1/16 | S7
C
1991

39.42 Point for the center 1/4 section corner at intersection with the E-W center line.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

T14S R1W
C 1/4 S7
1991

59.395 Point for the center N 1/16 section corner; not monumented.

79.37 The 1/4 section corner of sections 6 and 7.

From the 1/4 section corner of sections 7 and 8.

S. 89° 36' W., on the E-W center line of section 7.

20.36 Point for the center E 1/16 section corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

C $\frac{E\ 1/16}{S7}$ C
1991

Raise a mound of stone north of the corner.

40.72 The center 1/4 section corner.

80.94 Point for the center 80 1/16 section corner; not monumented.

101.05 Point for the center 100 1/16 section corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, in a collar of stone, with aluminum cap marked:

C $\frac{1/16}{S7}$ 100
1991

THE SUBDIVISION OF SECTION 7,
T. 14 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

- Raise a mound of stone north of the corner.
- 121.16** Point for the center 120 1/16 section corner; not monumented.
- 181.49** Point for the center 180 1/16 section corner.
- Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:
- $$C \frac{1/16}{S7} 180$$
- 1991
- Raise a mound of stone north of the corner.
- 201.60** Point for the center 200 1/16 section corner.
- Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:
- $$C \frac{1/16}{S7} 200$$
- 1991
- 205.77** The 1/4 section corner of section 7 only, on the west boundary of the Tp.,
hereinbefore described.
-
- From the center E 1/16 section corner.
- N. 1° 35' W., on the N-S center line of the NE 1/4.
- 39.58** The E 1/16 section corner of sections 6 and 7.
-
- From the E 1/16 section corner of sections 7 and 18.
- N. 0° 25' W., on the N-S center line of the SE 1/4.
- 19.785** Point for the SE 1/16 section corner at intersection with the E-W center line of the
SE 1/4.
- Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with
aluminum cap marked:
- $$SE \frac{1/16}{S7} 1991$$

THE SUBDIVISION OF SECTION 7,
T. 14 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Raise a mound of stone west of the corner.

39.57

The center E 1/16 section corner.

From the point for the S 1/16 section corner of sections 7 and 8.

S. 89° 49' W., on the E-W center line of the SE 1/4 of section 7.

20.135

The SE 1/16 section corner.

40.27

The center S 1/16 section corner.

From the 80 1/16 section corner of sections 7 and 18.

N. 0° 52' W., on the N-S 80 1/16 line of the SW 1/4 of section 7.

19.78

Point for the S 80 1/16 section corner at intersection with E-W center line of the SW 1/4.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

S $\frac{1}{16}$ 80
S7
1991

39.56

The point for the center 80 1/16 section corner.

From the 100 1/16 section corner of sections 7 and 18.

N. 0° 46' W., on the N-S 100 1/16 line of the SW 1/4 of section 7.

19.815

Point for the S 100 1/16 section corner at the intersection with the E-W center line of the SW 1/4.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

S $\frac{1}{16}$ 100
S7
1991

39.63

The center 100 1/16 section corner.

From the 120 1/16 section corner of sections 7 and 18.

THE SUBDIVISION OF SECTION 7,
T. 14 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS

N. 0° 40' W., on the N-S 120 1/16 line of the SW 1/4 of section 7.

19.85

Point for the S 120 1/16 section corner at the intersection with the E-W center line of the SW 1/4.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

S $\frac{1/16}{S7}$ 120
1991

Raise a mound of stone north of the corner.

39.70

The point for the center 120 1/16 section corner.

From the point for the 200 1/16 section corner of sections 7 and 18.

N. 0° 15' W., on the N-S 200 1/16 line of the SW 1/4 of section 7.

19.99

Point for the S 200 1/16 section corner at the intersection with the E-W center line of the SW 1/4.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

S $\frac{1/16}{S7}$ 200
1991

Raise a mound of stone north of the corner.

39.98

The center 200 1/16 section corner.

From the center S 1/16 section corner of section 7.

S. 89° 30' W., on the E-W center line of the SW 1/4.

40.29

The S 80 1/16 section corner.

60.435

The S 100 1/16 section corner.

80.58

The S 120 1/16 section corner.

161.16

The S 200 1/16 section corner.

THE SUBDIVISION OF SECTION 7,
T. 14 S., R. 1 W., SALT LAKE MERIDIAN, UTAH

CHAINS
165.365

The S 1/16 section corner of section 7 only, on the west boundary of the Tp.,
hereinbefore described.

From the center 100 1/16 section corner.

N. 0° 46' W., on the N-S 100 1/16 line of the NW 1/4.

19.98

Point for the N 100 1/16 section corner at intersection with the E-W center line of
the NW 1/4.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with
aluminum cap marked:

N $\frac{1/16}{S7}$ 100
1991

39.96

The point for the 100 1/16 section corner of sections 6 and 7.

From the center 180 1/16 section corner.

N. 0° 21' W., on the N-S 180 1/16 line of the NW 1/4.

19.995

Point for the N 180 1/16 section corner at intersection with the E-W center line of
the NW 1/4.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with
aluminum cap marked:

N $\frac{1/16}{S7}$ 180
1991

39.99

The point for the 180 1/16 section corner of sections 6 and 7.

From the point for the center N 1/16 section corner.

S. 89° 36' W., on the E-W center line of the NW 1/4.

60.21

The N 100 1/16 section corner.

140.49

The N 180 1/16 section corner.

164.70

The point for the N 1/16 section corner of section 7 only on the west boundary of
the Tp., hereinbefore described.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

Name	Capacity
Billy E. Shepard	Civil Engineering Technician
Brandon S. Sanchez	Survey Aid
Steven J. Oatman	Survey Aid


CERTIFICATE OF SURVEY

I, **Richard A. Zaninovich, Cadastral Surveyor**, hereby certify upon honor that, in pursuance of special instructions bearing the date of the *6th day of November, 1991*, I have *dependently resurveyed a portion of the west boundary a portion of the subdivisional lines and subdivided section 7, in Township 14 South, Range 1 West,*

of the *Salt Lake Meridian*, in the State of *Utah*, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

8-18-94

Date

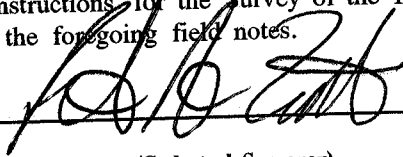

(Cadastral Surveyor)

Date

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Salt Lake City, Utah

The foregoing field notes of the *dependent resurvey of a portion of the west boundary, a portion of the subdivisional lines and the subdivision of section 7 in Township 14 South, Range 1 West, Salt Lake Meridian, Utah,*

executed by **Richard A. Zaninovich, Cadastral Surveyor**

having been critically examined and found correct, are hereby approved.

November 23, 1994

Date



(Chief Cadastral Surveyor for Utah)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF
THE DEPENDENT RESURVEY OF
PORTIONS OF THE
NORTH BOUNDARY AND SUBDIVISIONAL LINES
AND THE
SUBDIVISION OF SECTIONS 13, 24, AND 25,
IN
TOWNSHIP 13 SOUTH, RANGE 2 WEST

OF THE SALT LAKE MERIDIAN
IN THE STATE OF UTAH

EXECUTED BY

Richard A. Zaninovich
Cadastral Surveyor

Under special instructions dated *September 18, 1991*, approved *September 18, 1991*, which provided for the surveys included under Group Number 758, and assignment instructions dated *September 18, 1991*.

Survey commenced *October 7, 1991*

Survey completed *June 10, 1992*

INDEX DIAGRAM

Township 13 South, Range 2 West

6	5	4	3	2 2	2 1
7	8	9	10	11	12 8
18	17	16	15	14	7 6 13 6
19	20	21	22	23	24 5
30	29	28	27	26	4 25 3
31	32	33	34	35	36

The Subdivision of Section 13.....Page 8

The Subdivision of Section 24.....Page 9

The Subdivision of Section 25.....Page 11

TOWNSHIP 13 SOUTH, RANGE 2 WEST, SALT LAKE MERIDIAN, UTAH

CHAINS

The following field notes describe the dependent resurvey of portions of the north boundary and subdivisional lines and the subdivision of sections 13, 24 and 25, Township 13 South, Range 2 West, Salt Lake Meridian, Utah.

Portions of the north boundary were surveyed by A.J. Stewart in 1878 and by Stewart and Stewart in 1898; a portion was resurveyed by Bird and Nelson in 1944. The subdivisional lines were surveyed by Stewart and Stewart in 1898. A portion of the east boundary was resurveyed concurrently under this group. Stephen L. Ludlow, RLS 5342, and Ronald L. Enger, RLS, 6464, have executed surveys in this area.

The survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, the Special Instructions for Group No. 758, dated September 18, 1991.

The directions of lines were determined by hour angle observations of the sun and Polaris, carried forward by sustained angulation. Distances were determined by electronic measurement.

Preliminary to the resurvey the lines of the original survey were retraced and a diligent search was made for any evidence of the original field note record. Identified corners were remonumented in their original positions; lost corners were restored and monumented at proportionate positions based on the original record. The retracement data were thoroughly verified and only the true line notes are given herein.

The geographic position of the southeast corner of the township monumented with an aluminum post, 2 1/2 ins. diam., set in a mound of stone with aluminum cap marked as described in the official record of the concurrent resurvey of T. 13 S., R. 1 W., as determined by ties made to National Geodetic Survey Triangulation stations "CAPPS" and "CEDAR" (surveyed concurrently in T. 13 S., R. 1 W.), is as follows:

Latitude $39^{\circ} 37' 47.61''$ N. Longitude $111^{\circ} 59' 11.01''$ W.
N.A.D. 1927

The mean magnetic declination as projected from the U.S. Geological Survey Magnetic Declination Map of 1985, is $13 1/2^{\circ}$ E.

Dependent Resurvey of a Portion of the North Boundary,
T. 13 S., R. 2 W., Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by A.J. Stewart in 1878

DEPENDENT RESURVEY OF A PORTION OF THE NORTH BOUNDARY,
T. 13 S., R. 2 W., SALT LAKE MERIDIAN, UTAH

CHAINS

Beginning at the corner of sections 1, 6, 31, and 36, Tps. 12 and 13 S., Rs. 1 and 2 W., at the northeast corner of the township, monumented with an aluminum post, 2 1/2 ins., diam., projecting 6 ins. above the ground., with a Juab County Survey aluminum cap marked: T12N R2W R1W S36 S31 S1 S6 T13S 1985; this is accepted as a careful and faithful reestablishment of the corner position. No improvements were made on this monument.

Corner is located at the corner of fences projecting north, south and east.

S. 89° 07' W., between sections 1 and 36.

40.01

Point for the 1/4 section corner of sections 1 and 36 at proportionate distance; there is no remaining evidence of the original corner. Not monumented.

80.02

Point for the corner of sections 1, 2, 35, and 36 at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diameter, 24 ins. in the ground, with aluminum cap marked:

T12S R2W
S35 | S36
S2 | S1
T13S R2W
1991

Corner is located 75 lks. east of a fence which bears north and south.

S. 89° 07' W., between sections 2 and 35.

40.01

Point for the 1/4 section corner of sections 2 and 35 at proportionate distance; there is no remaining evidence of the original corner. Not monumented.

80.02

The corner of sections 2, 3, 34, and 35, monumented with a quartzite, 22x10x4 ins., marked with notches, 2 on the east and 4 on the west edges, set in a mound of stone; a rebar, 1/2 in. diam., is set alongside the marked stone.

from which

A juniper, 15 ins. diam., bears S. 30° E., 76 lks. dist., marked: T13S R2W
S2 BT (record 22 lks.).

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diameter, 10 ins. in the ground to bedrock, and in a mound of stone 4 ft. base, with aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE NORTH BOUNDARY,
T. 13 S., R. 2 W., SALT LAKE MERIDIAN, UTAH

CHAINS

T12S R2W
S34 | S35
S3 S2
T13S R2W
1991

Deposit the marked stone alongside and the rebar inside the aluminum post.

Corner is located 30 lks. west of a fence which bears north and south.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 13 S., R. 2 W., Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by
Stewart and Stewart in 1898

From the corner of sections 25, 30, 31, and 36 on the east boundary of the Tp.,
monumented with an aluminum post, 2 1/2 ins. diam., set in mound of stone, with
aluminum cap marked as described in the official record of the concurrent resurvey
of T. 13 S., R. 1 W.

N. 89° 27' W., between sections 25 and 36.

39.53

The 1/4 section corner of sections 25 and 36, monumented with a limestone,
16x10x6 ins., marked 1/4 on the north face, set in a mound of stone; a rebar, 1/2 in.
diam., with aluminum cap marked: T13S R2W 1/4 S25 S36 RLS 6464, is set
alongside the marked stone.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diameter, 10 ins. in the ground to
bedrock, and in a mound of stone, 4 ft. base, with aluminum cap marked:

T13S R2W
1/4 S25
S36
1992

Deposit the marked stone alongside and the rebar inside the aluminum post.

S. 89° 24' W., beginning new measurement.

39.98

The corner of sections 25, 26, 35, and 36, monumented with a sandstone, 14x8x6
ins., marked with notches, 1 on the south and 1 on the east edges, and a mound of
stone west of the corner.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 13 S., R. 2 W., SALT LAKE MERIDIAN, UTAH

CHAINS

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diameter, 24 ins. in the ground, in a collar of stone, with aluminum cap marked:

T13S R2W	
S26	S25
S35	S36
1991	

Deposit the marked stone alongside the aluminum post.

Corner is located 10 lks. east of the corner of fences projecting north, south and east.

From this corner a rebar, 1/2 in. diam., with aluminum cap marked: T13S R2W S25 S26 S35 S36 RLS 6464, bears West, 10 lks. dist.

N. 0° 12' W., between sections 25 and 26.

40.34

The 1/4 section corner of sections 25 and 26, monumented with a limestone, 16x10x6 ins., marked 1/4 on the west face; a rebar, 1/2 in. diam., with aluminum cap marked: T13S R2W 1/4 S25 S26 RLS 6464, is set alongside the marked stone.

from which

A juniper, 12 ins. diam., bears S. 78° E., 148 lks. dist., with scribe marks visible in a partly healed blaze (record 130 lks.).

A juniper, 10 ins. diam., bears S. 58° W., 45 lks. dist., with scribe marks visible in a partly healed blaze (record 48 lks.).

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone 4 ft. base, with aluminum cap marked:

T13S R2W	
1/4	
S26	S25
1991	

Deposit the marked stone alongside and the rebar inside the aluminum post.

Corner is located 60 lks. west of a fence which bears north and south.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 13 S., R. 2 W., SALT LAKE MERIDIAN, UTAH

CHAINS

From the corner of sections 19, 24, 25, and 30 on the east boundary of the Tp., monumented with an aluminum post, 2 1/2 ins. diam., projecting 6 ins. above the ground, with aluminum cap marked as described in the official record of the concurrent resurvey of T. 13 S., R. 1 W., and a mound of stone west of the corner.

N. 89° 25' W., between sections 24 and 25.

40.04

The 1/4 section corner of sections 24 and 25, monumented with a sandstone, 14x8x5 ins., marked 1/4 on the north face, and a mound of stone north of the corner; a rebar, 1/2 in. diam., with aluminum cap marked: T13S R2W 1/4 S24 S25 RLS 6464, is set alongside the marked stone.

from which

A juniper, 12 ins. diam., bears N. 11° W., 46 lks. dist., with a healed blaze (record 43 lks.).

A juniper, 12 ins. diam., bears S. 47° W., 30 lks. dist., with scribe marks visible in a partly healed blaze (record 22 lks.).

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

T13S R2W
1/4 S24
 S25
 1992

Deposit the marked stone alongside and the rebar inside the aluminum post.

Raise a mound of stone north of the corner.

S 89° 25' W., beginning new measurement.

19.74

Point for the W 1/16 section corner of sections 24 and 25.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, in a collar of stone, with aluminum cap marked:

W 1/16 S24
 S25
 1992

39.48

The corner of sections 23, 24, 25, and 26, monumented with a sandstone, 16x8x8 ins., marked with notches, 2 on the south and 1 on the east edges.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 13 S., R. 2 W., SALT LAKE MERIDIAN, UTAH

CHAINS

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, in a collar of stone, with aluminum cap marked:

T13S R2W	
<u>S23</u>	<u>S24</u>
S26	S25
1991	

Deposit the marked stone alongside and a magnet at base of the aluminum post.

Corner is located in a fence which bears north and south.

From this corner National Geodetic Survey Triangulation station "CAPPS" bears N. $84^{\circ} 05.2' W.$, 175.04 chs. dist.

From the corner of sections 13, 18, 19, and 24 on the east boundary of the Tp., monumented with an aluminum post, 2 1/2 ins., diam., set in a mound of stone, with aluminum cap marked as described in the official record of the concurrent resurvey of T. 13 S., R. 1 W.

S. $89^{\circ} 57' W.$, between sections 13 and 24.

20.04 Point for the E 1/16 section corner of sections 13 and 24; not monumented.

40.08 The 1/4 section corner of sections 13 and 24, monumented with a limestone, 16x8x6 ins., marked 1/4 on the north face; a rebar, 1/2 in. diam., with aluminum cap marked: T13S R2W 1/4 S13 S24 RLS 6464, is set alongside the marked stone.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, in a collar of stone, with aluminum cap marked:

T13S R2W	
1/4	<u>S13</u>
	S24
1991	

Deposit the marked stone alongside and the rebar inside the aluminum post.

Corner is located in a fence which bears east and west.

From the 1/4 section corner of sections 13 and 14, monumented with a sandstone, 24x10x8 ins., marked 1/4 on the west face.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 13 S., R. 2 W., SALT LAKE MERIDIAN, UTAH

CHAINS

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

T13W R2W
1/4
S14 | S13
1991

Deposit the marked stone alongside and a magnet at base of the aluminum post.

Raise a mound of stone west of the corner.

Corner is located in a fence which bears north and south.

North, between sections 13 and 14.

39.91

Point for the corner of sections 11, 12, 13, and 14 at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, in a collar of stone, with aluminum cap marked:

T13S R2W
S11 | S12
S14 | S13
1991

From this corner the corner of sections 1, 2, 35, and 36 on the north boundary of the Tp., hereinbefore described, bears N. $0^{\circ} 10' W.$, 154.45 chs. dist.

Also from this corner the point for the corner of sections 10, 11, 14, and 15, determined at the corner of fences projecting north and east, bears S. $89^{\circ} 36' W.$, 80.00 chs. dist.; this is accepted as the best available evidence of the original corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

T13S R2W
S10 | S11
S15 | S14
1991

Raise a mound of stone west of the corner.

These control lines were retraced and the intervening corners searched for but not found.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 13 S., R. 2 W., SALT LAKE MERIDIAN, UTAH

CHAINS

From the corner of sections 7, 12, 13, and 18 on the east boundary of the Tp., monumented with an aluminum post, 2 1/2 ins. diam., set in a collar of stone, with aluminum cap marked as described in the official record of the concurrent resurvey of T. 13 S., R. 1 W.

S. 89° 37' W., between sections 12 and 13.

40.00

Point for the 1/4 section corner of sections 12 and 13 at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

T13S R2W
1/4 S12
 S13
 1991

80.00

The corner of sections 11, 12, 13, and 14.

The Subdivision of Section 13,
T. 13 S., R. 2 W., Salt Lake Meridian, Utah

From the 1/4 section corner of sections 13 and 24.

N. 0° 07' E., on the N-S center line of section 13.

20.05

Point for the center S 1/16 section corner; not monumented.

40.10

Point for the center 1/4 section corner at intersection with the E-W center line.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

T13S R2W
C 1/4 S13
 1991

80.14

The 1/4 section corner of sections 12 and 13.

From the 1/4 section corner of sections 13 and 18 on the east boundary of the Tp. monumented with an aluminum post, 2 1/2 ins. diam., set in a collar of stone, with aluminum cap marked as described in the official record of the concurrent resurvey of T. 13 S., R. 1 W.

THE SUBDIVISION OF SECTION 13,
T. 13 S., R. 2 W., SALT LAKE MERIDIAN, UTAH

CHAINS

S. $89^{\circ} 49'$ W., on the E-W center line of section 13.

20.02

Point for the center E 1/16 section corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

C $\frac{E \ 1/16}{S13}$ C
1991

40.04

The center 1/4 section corner.

79.97

The 1/4 section corner of sections 13 and 14.

From the point for the E 1/16 section corner of sections 13 and 24.

N $0^{\circ} 05'$ E., on the N-S center line of the SE 1/4 of section 13.

20.07

Point for the SE 1/16 section corner, at intersection with the E-W center line of the SE 1/4.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

SE 1/16 S13
1991

40.14

The center E 1/16 section corner.

From the S 1/16 section corner of sections 13 and 18 on the east boundary of the Tp., monumented with an aluminum post, 2 1/2 ins. diam., projecting 6 ins. above the ground, with aluminum cap marked as described in the official record of the concurrent resurvey of T. 13 S., R. 1 W.

S. $89^{\circ} 53'$ W., on the E-W center line of the SE 1/4 of section 13.

20.03

The SE 1/16 section corner.

40.06

The point for the center S 1/16 section corner.

The Subdivision of Section 24,
T. 13 S., R. 2 W., Salt Lake Meridian, Utah

THE SUBDIVISION OF SECTION 24,
T. 13 S., R. 2 W., SALT LAKE MERIDIAN, UTAH

CHAINS

From the 1/4 section corner of sections 24 and 25.

N. $0^{\circ} 05'$ W., on the N-S center line of section 24.

39.83

Point for the center 1/4 section corner at intersection with the E-W center line.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 18 ins. in the ground to bedrock, and in a mound of stone 3 ft. base, with aluminum cap marked:

T13S R2W
C 1/4 S24
1992

79.95

The 1/4 section corner of sections 13 and 24.

From the 1/4 section corner of sections 19 and 24 on the east boundary of the Tp., monumented with an aluminum post, 2 1/2 ins., diam., set in a mound of stone, with aluminum cap marked as described in the official record of the concurrent resurvey of T. 13 S., R. 1 W.

N. $89^{\circ} 58'$ W., on the E-W center line of section 24.

40.20

The center 1/4 section corner.

59.975

Point for the center W 1/16 section corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

C $\frac{W 1/16}{S24}$ C
1992

Raise a mound of stone west of the corner.

Corner is located 10 lks. southeast of the corner of fences projecting south and west.

79.75

The 1/4 section corner of sections 23 and 24, monumented with a blue limestone, 10x6x5 ins. above ground, marked 1/4 on W face, with mound of stone W of corner. No improvements were made to this monument.

From the W 1/16 section corner of sections 24 and 25.

N. $0^{\circ} 08'$ W., on the N-S center line of the SW 1/4 of section 24.

THE SUBDIVISION OF SECTION 24,
T. 13 S., R. 2 W., SALT LAKE MERIDIAN, UTAH

CHAINS
40.04

The center W 1/16 section corner.

The Subdivision of Section 25,
T. 13 S., R. 2 W., Salt Lake Meridian, Utah

From the 1/4 section corner of sections 25 and 36.

N. 0° 09' W., on the N-S center line of section 25.

39.88

Point for the center 1/4 section corner at intersection with the E-W center line.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

T13S R2W
C 1/4 S25
1992

Raise a mound of stone west of the corner.

80.16

The 1/4 section corner of sections 24 and 25.

From the 1/4 section corner of sections 25 and 30 on the east boundary of the Tp., monumented with an aluminum post, 2 1/2 ins. diam., set in a mound of stone, with aluminum cap marked as described in the official record of the concurrent resurvey of T. 13 S., R. 1 W.

N. 89° 55' W., on the E-W center line of section 25.

39.70

The center 1/4 section corner.

59.70

Point for the center W 1/16 section corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 18 ins. in the ground to bedrock, and in a mound of stone 3 ft. base, with aluminum cap marked:

C — $\frac{W \ 1/16}{S25}$ — C
1992

79.70

The 1/4 section corner of sections 25 and 26.

THE SUBDIVISION OF SECTION 25,
T. 13 S., R. 2 W., SALT LAKE MERIDIAN, UTAH

CHAINS

From the center W 1/16 section corner.

N. 0° 13' E., on the N-S center line of the NW 1/4 of section 25.

40.06

The W 1/16 section corner of sections 24 and 25.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

Name	Capacity
Joseph Dhaenens	Surveying Technician
Brandon S. Sanchez	Surveying Technician
Steven J. Oatman	Survey Aid


CERTIFICATE OF SURVEY

I, *Richard A. Zaninovich, Cadastral Surveyor*, hereby certify upon honor that, in pursuance of special instructions bearing the date of the *18th day of September, 1991*, I have *dependently resurveyed portions of the north boundary and subdivisional lines and subdivided sections 13, 24, and 25, in Township 13 South, Range 2 West,*

of the *Salt Lake Meridian*, in the State of *Utah*, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

5-28-94

Date

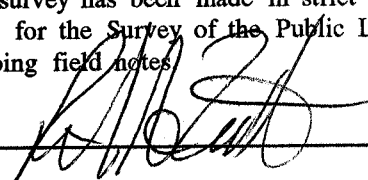
(Cadastral Surveyor)

Date

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Salt Lake City, Utah

The foregoing field notes of the *dependent resurvey of portions of the north boundary and subdivisional lines and the subdivision of sections 13, 24, and 25, in Township 13 South, Range 2 West, Salt Lake Meridian, Utah,*

executed by *Richard A. Zaninovich, Cadastral Surveyor*

having been critically examined and found correct, are hereby approved.

August 19, 1994

Date


(Chief Cadastral Surveyor, Utah State Office)

R-617

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF
THE DEPENDENT RESURVEY OF
PORTIONS OF THE WEST BOUNDARY,
SUBDIVISIONAL LINES,
AND SUBDIVISION OF SECTION 31
AND THE
SURVEY OF A PORTION OF THE SUBDIVISION OF SECTION 31
IN
TOWNSHIP 3 SOUTH, RANGE 3 WEST
OF THE UINTAH SPECIAL MERIDIAN
IN THE STATE OF UTAH

EXECUTED BY

Richard A. Zaninovich
Cadastral Surveyor

Under Supplemental special instructions dated *July 6, 1992*, approved *July 6, 1992*, which provided for the surveys included under Group Number 782, and assignment instructions dated *April 15, 1992*.

Survey commenced *July 7, 1992*
Survey completed *September 21, 1992*

INDEX DIAGRAM

Township 3 South, Range 3 West

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
1 31 2	32	33	34	35	36

The Survey of the Subdivision of Section 31.....Page 3

TOWNSHIP 3 SOUTH, RANGE 3 WEST, UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

The following field notes describe the dependent resurvey of portions of the west boundary, subdivisional lines and the subdivision of section 31 and the survey of a portion of the subdivision of section 31 in Township 3 South, Range 3 West, Uintah Special Meridian, Utah.

D.G. Major surveyed the west boundary in 1882; portions were retraced and resurveyed by Stewart and Booth in 1903 and Ralph Gentry in 1914. D.G. Major surveyed the subdivisional lines and subdivided the sections by the 3 mile method in 1882; Ralph Gentry retraced and resurveyed portions of the subdivisional lines in 1919. Portions of the south boundary were resurveyed concurrently under this group. Jerry D. Allred, RLS 3817, and Clinton S. Peatross, RLS 4779, have executed surveys for landowners in this area.

The survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, and Supplemental Special Instructions, dated July 6, 1992, for Group No. 782, Utah.

The directions of lines were determined by hour angle observations of the sun and Polaris, carried forward by sustained angulation. Distances were determined by electronic measurement.

Preliminary to the resurvey the lines of the original survey were retraced and a diligent search was made for any evidence of the original field note record. Identified corners were remonumented in their original positions; lost corners were restored and monumented at proportionate positions based on the original record. The retracement data were thoroughly verified and only the true line notes are given herein.

The geographic position of the corner of sections 5, 6, 31 and 32 on the south boundary of the township, as determined by ties made to National Geodetic Survey stations "BLUE BENCH" and "BRIDGELAND" is as follows:

Latitude $40^{\circ} 10' 15.37''$ N. Longitude $110^{\circ} 15' 20.27''$ W.
N.A.D. 1927

The mean magnetic declination as projected from the U.S. Geological Survey Magnetic Declination Map of 1985, is $13 \frac{1}{2}^{\circ}$ E.

Dependent Resurvey of a Portion of the West Boundary,
T. 3 S., R. 4 W., USM, Utah

Reestablishment of the Survey Executed by D.G. Major in 1882
and the Resurvey Executed by Ralph Gentry in 1914

Beginning at the corner of sections 31 and 36, T. 3 S., Rs. 3 and 4 W., monumented with an iron post, 3 ins. diam., projecting 6 ins. above the ground, with brass cap marked as described in the official record of the concurrent resurvey of T. 4 S., R. 3 W.

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY,
T. 3 S., R. 4 W., USM, UTAH

CHAINS

Corner is located at the corner of fences projecting north, west and southwest.

N. $0^{\circ} 09'$ W., between sections 31 and 36.

20.08

Point for the S $1/16$ section corner of sections 31 and 36 at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 ins. long, 2 $1/2$ ins. diameter, 24 ins. in the ground, with aluminum cap marked:

S $1/16$
S36 | S31
1992

Corner is located 35 lks. south of the center line of old Utah State Highway 40 and 35 lks. east of a fence which bears north and south.

40.16

The $1/4$ section corner of sections 31 and 36, monumented with an iron post, 1 in. diam., set in a mound of stone, with brass cap marked as described in the official record of the 1914 resurvey.

Corner is located at the corner of fences projecting north, south and west.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 3 S., R. 3 W., USM, Utah

Reestablishment of the Survey Executed by D.G. Major in 1882
and the Retracement Executed by Ralph Gentry in 1919

From the corner of sections 5, 6, 31, and 32, on the south boundary of the township, monumented with an aluminum post, 2 $1/2$ ins. diam., set in a collar of stone, with aluminum cap marked as described in the official record of the concurrent resurvey of T. 4 S., R. 3 W., and a mound of stone west of the corner.

Corner is located 60 lks. west of the corner of fences projecting south and east.

N. $0^{\circ} 25'$ E., between sections 31 and 32.

19.935

Point for the S $1/16$ section corner of sections 31 and 32 at proportionate distance; there is no remaining evidence of the original corner. Not monumented.

39.87

Point for the $1/4$ section corner of sections 31 and 32 at proportionate distance; there is no remaining evidence of the original corner. Not monumented.

59.805

Point for the N $1/16$ section corner of sections 31 and 32 at proportionate distance; there is no remaining evidence of the original corner. Not monumented.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES, T. 3 S., R. 3 W., USM, UTAH

CHAINS
79.74

Point for the corner of sections 29, 30, 31, and 32 at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diameter, 24 ins. in the ground, with aluminum cap marked:

T3S	R3W
S30	S29
S31	S32
1992	

Raise a mound of stone west of the corner.

From this corner

The corner of sections 28, 29, 32 and 33, monumented with an iron post, 2 ins. diam., set in a collar of stone, with iron cap marked:
T3S R3W S28 S29 S32 S33 1990, bears N. 89° 22' E., 79.22 chs.
dist. This corner was remonumented by Jerry D. Allred, RLS 3817.

The corner of sections 25, 30, 31, and 36 on the west boundary of the township, monumented with an iron post, 3 ins., diam., projecting 12 ins. above the ground, with brass cap marked as described in the official record of the 1914 resurvey, bears S. 89° 49' W., 78.55 chs. dist.

The corner of sections 19, 20, 29, and 30, monumented with an iron post, 2 ins. diam., projecting 6 ins. above the ground, with brass cap marked as described in the official record of the 1919 resurvey, and a mound of stone west of the corner, bears N. 0° 14' E., 79.74 chs. dist.

These control lines were retraced in the course of the 1919 resurvey and no evidence of the intervening corners was found.

From this corner National Geodetic Survey station "BLUE BENCH" bears N. 35° 03' 15" W., 204.95 chs. dist.

Dependent Resurvey of a Portion of the Subdivision of
Section 31, T. 3 S., R. 3 W., USM, Utah

Reestablishment of the Survey Executed by D.G. Major in 1882

From the point for the S 1/16 section corner of sections 31 and 32.

S. 89° 30' W., on the center line of the south 1/2 of section 31.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISION OF
SECTION 31, T. 3 S., R. 3 W., USM, UTAH

CHAINS**19.60**

Point for the SE 1/16 section corner at proportionate distance; there is no remaining evidence of the original corner. Not monumented.

39.20

Point for the center S 1/16 section corner at proportionate distance; there is no remaining evidence of the original corner. Not monumented.

From this point a rebar, 1/2 in. diam., with plastic cap marked: LS 4779, bears N. $74^{\circ} 56'$ W., 94 lks. dist.

58.80

Point for the SW 1/16 section corner at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diameter, 24 ins. in the ground, in a collar of stone, with aluminum cap marked:

SW 1/16 S31
1992

From this corner a rebar, 1/2 in. diam., no cap, bears N. $81^{\circ} 28'$ W., 88 lks. dist.

77.96

The S 1/16 section corner of sections 31 and 36 on the west boundary of the township, hereinbefore described.

From the point for the 1/4 section corner of sections 31 and 32.

S. $89^{\circ} 36'$ W., on the east and west center line of section 31.

19.69

Point for the center E 1/16 section corner at proportionate distance; there is no remaining evidence of the original corner. Not monumented.

39.38

Point for the center 1/4 section corner at proportionate distance; there is no remaining evidence of the original corner. Not monumented.

59.07

Point for the center W 1/16 section corner at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diameter, 24 ins. in the ground, in a collar of stone, with aluminum cap marked:

C $\frac{W 1/16}{S31}$ C
1992

78.15

The 1/4 section corner of sections 31 and 36 on the west boundary of the township, hereinbefore described.

THE SURVEY OF THE SUBDIVISION OF SECTION 31,
T. 3 S., R. 3 W., USM, UTAH

CHAINS

The Survey of the Subdivision of Section 31,
T. 3 S., R. 3 W., USM, Utah

From the W 1/16 section corner of sections 6 and 31 on the south boundary of the township, monumented with an aluminum post, 2 1/2 ins. diam., set flush with the surface of the ground in an alfalfa field, with aluminum cap marked as described in the official record of the concurrent resurvey of T. 4 S., R. 3 W.

Corner is located 68 lks. east of a fence which bears north and south.

N. 1° 42' E., on the N-S center line of the SW 1/4 of section 31.

20.06

The SW 1/16 section corner.

N. 0° 22' W., beginning new measurement.

20.04

The center W 1/16 section corner.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

Name	Capacity
Joseph M. Dhaenens	Survey Technician

CERTIFICATE OF SURVEY

I, *Richard A. Zaninovich, Cadastral Surveyor*, hereby certify upon honor that, in pursuance of supplemental special instructions bearing the date of the *6th day of July, 1992*, I have *dependently resurveyed portions of the west boundary, subdivisional lines and the subdivision of section 31 and surveyed a portion of the subdivision of section 31, in Township 3 South, Range 3 West,*

of the *Uintah Special Meridian*, in the State of *Utah*, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

8-26-94

Date


(Cadastral Surveyor)

Date

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Salt Lake City, Utah

The foregoing field notes of the *dependent resurvey of portions of the west boundary, subdivisional lines and the subdivision of section 31 and the survey of a portion of the subdivision of section 31, in Township 3 South, Range 3 West, Uintah Special Meridian, Utah,*

executed by *Richard A. Zaninovich, Cadastral Surveyor*

having been critically examined and found correct, are hereby approved.

November 23, 1994

Date


(Chief Cadastral Surveyor for Utah)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

R-617

FIELD NOTES

OF
THE DEPENDENT RESURVEY OF
PORTIONS OF THE NORTH, EAST AND WEST BOUNDARIES,
AND SUBDIVISIONAL LINES,
AND THE SUBDIVISION OF CERTAIN SECTIONS
IN
TOWNSHIP 4 SOUTH, RANGE 3 WEST

OF THE UINTAH SPECIAL MERIDIAN
IN THE STATE OF UTAH

EXECUTED BY

Richard A. Zaninovich
Cadastral Surveyor

Under special instructions dated and approved *April 9, 1992 and Supplemental Special Instructions dated and approved July 6, 1992*, which provided for the surveys included under Group Number 782, and assignment instructions dated *April 15, 1992*.

Survey commenced *June 17, 1992*
Survey completed *September 21, 1992*

INDEX DIAGRAM

Township 4 South, Range 3 West

5					4
					3
3	6	15 5	4	14 3	13 2
			15	14	12
					8 1
7	8	9	13 10	11 11	7 12
				10	6
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

The Subdivision of Section 1.....	Page 16
The Subdivision of Section 2.....	Page 18
The Subdivision of Section 3.....	Page 20
The Subdivision of Section 4.....	Page 22
The Subdivision of Section 6.....	Page 23
The Subdivision of Section 9.....	Page 24
The Subdivision of Section 10.....	Page 25
The Subdivision of Section 11.....	Page 27
The Subdivision of Section 12.....	Page 29

TOWNSHIP 4 SOUTH, RANGE 3 WEST, UINTAH SPECIAL MERIDIAN, UTAH

CHAINS

The following field notes describe the dependent resurvey of portions of the north, east and west boundaries and subdivisional lines and the subdivision of certain sections in Township 4 South, Range 3 West, Uintah Special Meridian, Utah.

The north, east and west boundaries and subdivisional lines were surveyed by D.G. Major in 1882 and resurveyed by Stewart and Stewart in 1904. Ralph Gentry resurveyed portions of the north and east boundaries in 1919. D.G. Major subdivided all sections by the 3 mile method in 1882; the lottings and areas shown on the approved plat of the 1904 resurvey reflect the normal method of section subdivision. Jerry D. Allred, RLS 3817, and Clinton S. Peatross, RLS 4779, have executed surveys for landowners in this area.

The survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, the Special Instructions dated April 9, 1992 and Supplemental Special Instructions, dated July 6, 1992, for Group No. 782, Utah.

The directions of lines were determined by hour angle observations of the sun and Polaris, carried forward by sustained angulation. Distances were determined by electronic measurement.

Preliminary to the resurvey the lines of the original survey were retraced and a diligent search was made for any evidence of the original field note record. Identified corners were remonumented in their original positions; lost corners were restored and monumented at proportionate positions based on the original record. The retracement data were thoroughly verified and only the true line notes are given herein.

The geographic position of the W 1/16 section corner of sections 12 and 13 as determined by ties made to National Geodetic Survey stations "BLUE BENCH" and "BRIDGELAND" is as follows:

Latitude $40^{\circ} 08' 31.82''$ N. Longitude $110^{\circ} 10' 30.48''$ W.
N.A.D. 1927

The mean magnetic declination as projected from the U.S. Geological Survey Magnetic Declination Map of 1985, is $13 \frac{1}{2}^{\circ}$ E.

Dependent Resurvey of a Portion of the East Boundary,
T. 4 S., R. 3 W., USM, Utah

Reestablishment of the Survey Executed by D.G. Major in 1882
and the Resurvey Executed by Stewart and Stewart in 1904

Beginning at the corner of sections 1, 6, 7, and 12 on the east boundary of the township, determined at the corner of fences projecting east, west and south; this is accepted as the best available evidence of the original corner.

DEPENDENT RESURVEY OF A PORTION OF THE EAST BOUNDARY,
T. 4 S., R. 3 W., USM, UTAH

CHAINS

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diameter, 24 ins. in the ground, with aluminum cap marked:

T4S	
R3W	R2W
S1	S6
S12	S7
1992	

N. 0° 26' W., between sections 1 and 6.

40.21

Point for the 1/4 section corner of sections 1 and 6 at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diameter, 24 ins. in the ground, over a steel fence post driven 5 ft. in the ground, with aluminum cap marked:

T4S	
R3W	R2W
1/4	
S1	S6
1992	

Reestablishment of the Survey Executed by D.G. Major in 1882
and the Resurveys Executed by Stewart and Stewart in 1904
and Ralph Gentry in 1919

N. 0° 45' W., beginning new measurement.

19.815

Point for the N 1/16 section corner of section 6 only, T. 4 S., R. 2 W..

Set an aluminum post, 30 ins. long, 2 1/2 ins. diameter, 24 ins. in the ground, with aluminum cap marked:

N 1/16
S6
1992

20.31

Point for the N 1/16 section corner of section 1 only.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diameter, 24 ins. in the ground, with aluminum cap marked:

N 1/16
S1
1992

DEPENDENT RESURVEY OF A PORTION OF THE EAST BOUNDARY,
T. 4 S., R. 3 W., USM, UTAH

CHAINS

40.62

The corner of sections 1, 6, 31, and 36, Tps. 3 and 4 S., Rs. 2 and 3 W., monumented with an iron post, 3 ins. diam., projecting 6 ins. above the ground, with brass cap marked as described in the official record of the 1919 resurvey.

Dependent Resurvey of a Portion of the West Boundary,
T. 4 S., R. 3 W., USM, Utah

Reestablishment of the Survey Executed by D.G. Major in 1882
and the Resurvey Executed by Stewart and Stewart in 1904

From the 1/4 section corner of sections 1 and 6, on the west boundary of the township, determined at the corner of fences projecting north, south and east; this is accepted as the best available evidence of the original corner.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diameter, 24 ins. in the ground, with aluminum cap marked:

T4S
R4W R3W
1/4
S1 | S6
1992

N. 0° 28' W., between sections 1 and 6.

36.00

The corner of sections 1 and 6, T. 4 S., Rs. 3 and 4 W., monumented with an aluminum post, 2 1/2 ins. diam., projecting 8 ins. above the ground, with Duchesne County Survey aluminum cap marked: T4S R3W R4W S1 S6 1992; this is accepted as the locally recognized corner position, properly established under the authority of the county surveyor.

Corner is located in a fence which bears east and west.

Dependent Resurvey of a Portion of the North Boundary,
T. 4 S., R. 3 W., USM, Utah

Reestablishment of the Survey Executed by D.G. Major in 1882
and the Resurveys Executed by Stewart and Stewart in 1904
and Ralph Gentry in 1919

From the corner of sections 1, 6, 31, and 36, Tps. 3 and 4 S., Rs. 2 and 3 W., hereinbefore described.

N. 89° 27' W., between sections 1 and 36.

DEPENDENT RESURVEY OF A PORTION OF THE NORTH BOUNDARY,
T. 4 S., R. 3 W., USM, UTAH

CHAINS
20.29

Point for the E 1/16 section corner of sections 1 and 36 at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diameter, 20 ins. in the ground, in a collar of stone, with aluminum cap marked:

E 1/16 $\frac{S36}{S1}$
1992

40.58

Point for the 1/4 section corner of sections 1 and 36, determined latitudinally by a fence which bears east and west and at proportionate distance longitudinally; this is accepted as the best available evidence of the original corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diameter, 20 ins. in the ground, in a collar of stone, with aluminum cap marked:

T3S R3W
1/4 $\frac{S36}{S1}$
T4S
1992

N. 89° 47' W., beginning new measurement.

20.12

The W 1/16 section corner of sections 1 and 36, determined at the corner of fences projecting north, south, east and west; this is accepted as the best available evidence of the original corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diameter, 20 ins. in the ground, in a collar of stone, with aluminum cap marked:

W 1/16 $\frac{S36}{S1}$
1992

Reestablishment of the Survey Executed by D.G. Major in 1882
and the Resurvey Executed by Stewart and Stewart in 1904

From the corner of sections 5, 6, 31, and 32, monumented with a sandstone, 14x8x6 ins., marked with 5 notches and the letter A on the east face, and a mound of stone west of the corner.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diameter, 18 ins. in the ground, in a collar of stone, with aluminum cap marked:

DEPENDENT RESURVEY OF A PORTION OF THE NORTH BOUNDARY,
T. 4 S., R. 3 W., USM, UTAH

CHAINS

T3S R3W
 $\frac{S31}{S6} \mid \frac{S32}{S5}$
 T4S
 1992

Deposit marked stone alongside the aluminum post.

Raise a mound of stone west of the corner.

Corner is located 60 lks. west of the corner of fences projecting south and east.

S. $89^{\circ} 24'$ W., between sections 6 and 31.

39.50

Point for the $1/4$ section corner of sections 6 and 31 at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 ins. long, 2 $1/2$ ins. diameter, 24 ins. in the ground, with aluminum cap marked:

T3S R3W
 $\frac{1/4}{S6} \mid \frac{S31}{S5}$
 T4S
 1992

Corner is located 30 lks. south of the center line of old Utah State Highway 40.

59.25

Point for the W $1/16$ section corner of sections 6 and 31 at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 ins. long, 2 $1/2$ ins. diameter, 30 ins. in the ground, in an alfalfa field, with aluminum cap marked:

W $1/16$ $\frac{S31}{S6}$
 1992

Deposit a magnet at base of the aluminum post.

Corner is located 68 lks. east of a fence which bears north and south.

77.77

The corner of sections 1, 6, 31, and 36, Tps. 3 and 4 S., Rs. 3 and 4 W., monumented with an iron post, 3 ins. diam., projecting 6 ins. above the ground, with brass cap marked as described in the official record of the 1914 resurvey; this will now function as the corner of sections 31 and 36 only.

Remove the marks pertaining to T. 4 S. and add the date 1992 to the brass cap.

DEPENDENT RESURVEY OF A PORTION OF THE NORTH BOUNDARY,
T. 4 S., R. 3 W., USM, UTAH

CHAINS

Corner is located at the corner of fences projecting north, west and southwest.

N. $89^{\circ} 29'$ W., between sections 6 and 36.

7.25 The corner of sections 1 and 6, T. 4 S., Rs. 3 and 4 W., hereinbefore described.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 4 S., R. 3 W., USM, Utah

Reestablishment of the Survey Executed by D.G. Major in 1882,
and the Resurvey Executed by Stewart and Stewart in 1904

From the W $1/16$ section corner of sections 12 and 13, monumented with a sandstone, 14x6x4 ins., marked $1/16$ on the south face and the letter A on top.

At the corner point

Set an aluminum post, 30 ins. long, 2 $1/2$ ins. diam., 24 ins. in the ground, with aluminum cap marked:

W $1/16$	$\frac{S12}{S13}$ 1992
----------	---------------------------

Deposit the marked stone alongside the aluminum post.

Raise a mound of stone north of the corner.

From this corner National Geodetic Survey station "BRIDGELAND" bears S. $17^{\circ} 53' 02''$ W., 82.07 chs. dist.

S. $88^{\circ} 53'$ W., between sections 12 and 13.

20.10 The corner of sections 11, 12, 13, and 14, monumented with a sandstone, 20x10x5 ins., marked with notches 4 on the south and 1 on the east and the letter A on the east face, set in a mound of stone; a rebar, $1/2$ in. diam., is set alongside the marked stone.

At the corner point

Set an aluminum post, 30 ins. long, 2 $1/2$ ins. diam., 24 ins. in the ground, with aluminum cap marked:

T4S R3W	
$\frac{S11}{S14}$	$\frac{S12}{S13}$
1992	

Deposit the marked stone alongside and rebar inside the aluminum post.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 4 S., R. 3 W., USM, UTAH

CHAINS

Raise a mound of stone west of the corner.

N. $0^{\circ} 28'$ E., between sections 11 and 12.

40.06

The $1/4$ section corner of sections 11 and 12, monumented with a rebar, $1/2$ in. diam., with unmarked aluminum cap, set 12 ins. below the the surface at the intersection of roads projecting north, south, east and west; this is accepted as a careful and faithful reestablishment of the corner position.

from which

An aluminum post, 30 ins. long, $2\frac{1}{2}$ ins. diam., set 24 ins. in the ground, for a reference monument, with aluminum cap marked: RM $1/4$ S12 1992 30FT and an arrow pointing to the corner, bears S. $44^{\circ} 32'$ E., 45.5 lks. dist.

An aluminum post, 30 ins. long, $2\frac{1}{2}$ ins. diam., set 24 ins. in the ground, for a reference monument, with aluminum cap marked: RM $1/4$ S11 1992 30FT and an arrow pointing to the corner, bears S. $45^{\circ} 28'$ W., 45.5 lks. dist.

N. $0^{\circ} 09'$ W., beginning new measurement

20.15

Point for the N $1/16$ section corner of sections 11 and 12, determined at the projected intersection of the center line of a road which bears north and south with fences which project east and west; this is accepted as the best available evidence of the original corner.

Set a rebar, 24 ins. long, $1/2$ in. diam., flush with the surface of the road.

from which

An aluminum post, 30 ins. long, $2\frac{1}{2}$ ins. diam., set 24 ins. in the ground, for a reference monument, with aluminum cap marked: RM N $1/16$ S12 1992 29FT and an arrow pointing to the corner, bears N. $45^{\circ} 01'$ E., 44 lks. dist.

An aluminum post, 30 ins. long, $2\frac{1}{2}$ ins. diam., set 24 ins. in the ground, for a reference monument, with aluminum cap marked: RM N $1/16$ S12 1992 29FT and an arrow pointing to the corner, bears S. $44^{\circ} 59'$ E., 44 lks. dist.

N. $0^{\circ} 28'$ W., beginning new measurement.

19.91

Point for the corner of sections 1, 2, 11, and 12, determined at proportionate distance latitudinally and longitudinally at the center line of a road which bears north and south; this is accepted as the best available evidence of the original corner.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 4 S., R. 3 W., USM, UTAH

CHAINS

Set a rebar, 24 ins. long, 1/2 in. diam., flush with the surface of the road.
from which

An aluminum post, 30 ins. long, 2 1/2 ins. diam., set 24 ins. in the ground,
for a reference monument, with aluminum cap marked: RM T4S R3W S12
1992 41.2 FT and an arrow pointing to the corner, bears S. $37^{\circ} 10'$ E.,
62.4 lks. dist.

An aluminum post, 30 ins. long, 2 1/2 ins. diam., set 24 ins. in the ground,
for a reference monument, with aluminum cap marked: RM T4S R3W S11
1992 41.2 FT and an arrow pointing to the corner, bears S. $36^{\circ} 40'$ W.,
62.4 lks. dist.

From the point for the E 1/16 section corner of sections 1 and 12, determined at
the projected intersection of the center line of a road which bears north and south
with fences which project east and west; this is accepted as the best available
evidence of the original corner.

Set a rebar, 24 ins. long, 2 1/2 ins. diam., flush with the surface of the road.

from which

An aluminum post, 30 ins. long, 2 1/2 ins., diam., set 24 ins. in the ground,
for a reference monument, with aluminum cap marked: RM E 1/16 S12
1992 33FT and an arrow pointing to the corner, bears S. $44^{\circ} 49'$ W.,
50 lks. dist.

An aluminum post, 30 ins. long, 2 1/2 ins., diam., set 24 ins. in the ground,
for a reference monument, with aluminum cap marked: RM E 1/16 S1
1992 33 FT and an arrow pointing to the corner, bears N. $45^{\circ} 11'$ W., 50
lks. dist.

S. $89^{\circ} 54'$ W., between sections 1 and 12.

19.88

The 1/4 section corner of sections 1 and 12, determined at the corner of fences
projecting north, south, east and west; this is accepted as the best available evidence
of the original corner.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with
aluminum cap marked:

T4S R3W
1/4 $\frac{S1}{S12}$
1992

S. $89^{\circ} 39'$ W., beginning new measurement.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 4 S., R. 3 W., USM, UTAH

CHAINS
20.20

The W 1/16 section corner of sections 1 and 12, determined at the corner of fences projecting north, south, east and west; this is accepted as the best available evidence of the original corner.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, in a collar of stone, with aluminum cap marked:

W 1/16	<u>S1</u>
	S12
	1992

N. 88° 26' W., beginning new measurement.

20.28

The corner of sections 1, 2, 11, and 12.

N. 1° 04' W., between sections 1 and 2.

20.025

Point for the S 1/16 section corner of sections 1 and 2 at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a steel fence post driven 5 ft. in the ground, with aluminum cap marked:

S 1/16
S2 S1
1992

40.05

The 1/4 section corner of sections 1 and 2, monumented with a rebar, 1/2 in. diam., projecting 4 ins. above the ground; this is accepted as a careful and faithful establishment of the corner position; there is no remaining evidence of the original witness corner.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

T4S R3W
1/4
S2 S1
1992

Deposit the rebar inside the aluminum post.

N. 0° 59' W., beginning new measurement.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 4 S., R. 3 W., USM, UTAH

CHAINS
20.54

Point for the N 1/16 section corner of sections 1 and 2 at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

N 1/16
S2 | S1
1992

Corner is located 50 lks. north and 10 lks. west of a rebar, 1/2 in. diam., set at the corner of fences projecting north, east and west; this point was established at an incorrect proportionate position.

41.08

The corner of sections 1, 2, 35, and 36 on the north boundary of the Tp., determined at the corner of fences projecting north, south, east and west; this is accepted as the best available evidence of the original corner.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, in a collar of stone, with aluminum cap marked:

T3S R3W
S35 | S36
S2 | S1
T4S
1992

From this corner a rebar, 1/2 in. diam., projecting 4 ins. above the ground, bears West, 54 lks. dist.

From the corner of sections 11, 12, 13, and 14.

N. 89° 40' W., between sections 11 and 14.

20.08

The E 1/16 section corner of sections 11 and 14, monumented with a sandstone, 18x10x8 ins., marked 1/16 on the east face and the letter A on top.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

E 1/16 $\frac{S11}{S14}$
1992

Deposit the marked stone alongside the aluminum post.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 4 S., R. 3 W., USM, UTAH

CHAINS

Raise a mound of stone north of the corner.

Corner is located 40 lks. west of a fence which bears north and south.

From the 1/4 section corner of sections 10 and 11, determined at the projected intersection of the east right-of-way fence of a road which bears north and south with the center line of a road which bears east and west; this is accepted as the best available evidence of the original corner.

At the corner point

Set a spike flush with the surface of the road.

from which

An aluminum post, 30 ins. long, 2 1/2 ins. diam., set 24 ins. in the ground, for a reference monument, with aluminum cap marked: RM 1/4 S11 1992 20 FT and an arrow pointing to the corner, bears N. 44° 55' E., 30.3 lks. dist.

An aluminum post, 30 ins. long, 2 1/2 ins. diam., set 24 ins. in the ground, for a reference monument, with aluminum cap marked: RM 1/4 S11 1992 35 FT and an arrow pointing to the corner, bears S. 45° 05' E., 53.0 lks. dist.

N. 0° 08' E., between sections 10 and 11.

20.22

Point for the N 1/16 section corner of sections 10 and 11 at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

N 1/16
S10 | S11
1992

Corner is located 50 lks. east of the center line of a road which bears north and south.

40.44

The corner of sections 2, 3, 10, and 11, monumented with an aluminum post, 2 1/2 ins. diam., projecting 8 ins. above the ground, with Duchesne County Survey aluminum cap marked: T4S R3W S2 S3 S10 S11 1990; this is accepted as a careful and faithful remonumentation of the corner position; an old scribed cedar post is set alongside the aluminum post.

Corner is located at the corner of fences projecting north, east and west.

From the corner of sections 1, 2, 11, and 12.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 4 S., R. 3 W., USM, UTAH

CHAINS

N. 89° 50' W., between sections 2 and 11.

- 20.135** Point for the E 1/16 section corner of sections 2 and 11 at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

E 1/16	$\frac{S2}{S11}$
	1992

Corner is located 40 lks. east of a fence which bears north and south.

- 40.27** Point for the 1/4 section corner of sections 2 and 11 at proportionate distance falls near the center line of Utah State Highway 40; there is no remaining evidence of the original corner.

Set a PK nail in the surface of the road.

from which

An aluminum post, 30 ins. long, 2 1/2 ins. diam., set 30 ins. in the ground with a magnet at its base, for a reference monument, with aluminum cap marked: RM 1/4 S2 1992 50 FT and an arrow pointing to the corner, bears N. 44° 14' E., 75.8 lks. dist.

An aluminum post, 30 ins. long, 2 1/2 ins. diam., set 24 ins. in the ground with a magnet at its base, for a reference monument, with aluminum cap marked: RM 1/4 S2 1992 50 FT and an arrow pointing to the corner, bears N. 45° 46' W., 75.8 lks. dist.

- 60.405** Point for the W 1/16 section corner of sections 2 and 11 at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

W 1/16	$\frac{S2}{S11}$
	1992

Corner is located 10 lks. south and 100 lks. east of the corner of fences projecting north, east and west.

- 80.54** The corner of sections 2, 3, 10, and 11.

N. 0° 42' W., between sections 2 and 3.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 4 S., R. 3 W., USM, UTAH

CHAINS**20.535**

Point for the S 1/16 section corner of sections 2 and 3 at proportionate distance falls in a slough near the south bank of the Duchesne River, not suitable for a permanent monument; there is no remaining evidence of the original corner.

From this point the witness corner, hereinafter described, bears S. 89° 27' W., 7.00 chs. dist.

41.07

Point for the 1/4 section corner of sections 2 and 3 at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

T4S R3W
1/4
S3 | S2
1992

80.66

The corner of sections 2, 3, 34, and 35, on the north boundary of the Tp., monumented with a PK nail set in the surface at the intersection of roads projecting north, east and west; this is accepted as a careful and faithful reestablishment of the corner position.

From the 1/4 section corner of sections 9 and 10, monumented with an aluminum post, 2 1/2 ins. diam., buried 6 ins. below the surface of the ground, with Duchesne County Survey aluminum cap marked: T4S R3W 1/4 S9 S10 1985; this is accepted as a careful and faithful reestablishment of the corner position.

N. 0° 29' E., between sections 9 and 10.

39.85

The corner of sections 3, 4, 9 and 10, monumented with an aluminum post, 2 1/2 ins. diam., set over a steel fence post in a marshy area, with Duchesne County Survey aluminum cap marked: T4S R3W S3 S4 S9 S10 1990; this is accepted as a careful and faithful reestablishment of the corner position.

From the corner of sections 2, 3, 10, and 11.

S. 89° 56' W., between sections 3 and 10.

20.015

Point for the E 1/16 section corner of sections 3 and 10 at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

E 1/16 $\frac{S3}{S10}$
1992

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 4 S., R. 3 W., USM, UTAH

CHAINS

Corner is located 15 lks. east of a fence which bears north and south, 50 lks. north of its intersection with a fence which projects east and 45 lks. south of its intersection with a fence which projects west.

40.03

Point for the 1/4 section corner of sections 3 and 10 at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 30 ins. in the ground, in a corn field, with aluminum cap marked:

T4S R3W
1/4 $\frac{S3}{S10}$
1992

Deposit a magnet at base of the aluminum post.

Corner is located 80 lks. east of a fence which bears north and south.

80.06

The corner of sections 3, 4, 9, and 10.

N. 0° 48' W., between sections 3 and 4.

19.875

Point for the S 1/16 section corner of sections 3 and 4 at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

S 1/16
S4 | S3
1992

Corner is located 30 lks. north of a fence which bears east and west.

39.75

Point for the 1/4 section corner of sections 3 and 4 at proportionate distance falls in a stack yard; there is no remaining evidence of the original corner; not monumented.

80.17

The corner of sections 3, 4, 33, and 34 on the north boundary of the Tp, monumented with an aluminum post, 2 1/2 ins. diam., set in a mound of stone, with Duchesne County Survey aluminum cap marked: T3S R3W S3 S4 S33 S34 T4S 1981; this is accepted as a careful and faithful remonumentation of the original corner.

From the corner of sections 3, 4, 9, and 10.

S. 89° 55' W., between sections 4 and 9.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 4 S., R. 3 W., USM, UTAH

CHAINS
19.98

Point for the E 1/16 section corner of sections 4 and 9 at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, in a collar of stone, with aluminum cap marked:

E 1/16	$\begin{array}{r} \text{S4} \\ \hline \text{S9} \\ 1992 \end{array}$
--------	--

39.96

Point for the 1/4 section corner of sections 4 and 9 at proportionate distance falls in an alfalfa field; there is no remaining evidence of the original corner; not monumented.

79.92

The corner of sections 4, 5, 8, and 9, monumented with an aluminum post, 2 1/2 ins. diam., set in a collar of stone, with Duchesne County Survey aluminum cap marked: T4S R3W S4 S5 S8 S9 1990; this is accepted as a careful and faithful reestablishment of the corner position.

Corner is located 10 lks. north of the corner of fences projecting north, east and west.

From the corner of sections 5, 6, 7, and 8, monumented with a sandstone, 18x10x8 ins., marked with 5 notches on the south edge and the letter A on the east face; a rebar, 1/2 in. diam., is set alongside the marked stone.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

T4S R3W	
$\frac{\text{S6}}{\text{S7}}$	$\frac{\text{S5}}{\text{S8}}$
1992	

Deposit the marked stone alongside and the rebar inside the aluminum post.

Raise a mound of stone north of the corner.

From this corner, the corner of sections 4, 5, 8, and 9, bears S. 89° 26' E., 79.75 chs. distance.

N. 0° 33' W., between sections 5 and 6.

38.85

Point for the 1/4 section corner of sections 5 and 6 at proportionate distance falls in a slough; there is no remaining evidence of the original witness corner; not monumented.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL
LINES, T. 4 S., R. 3 W., USM, UTAH

CHAINS
78.30

The corner of sections 5, 6, 31, and 32 on the north boundary of the Tp.,
hereinbefore described.

The Subdivision of Section 1,
T. 4 S., R. 3 W., USM, Utah

From the 1/4 section corner of sections 1 and 12.

N. 1° 10' W., on the N-S center line of section 1.

40.49

Point for the center 1/4 section corner at intersection with the E-W center line.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with
aluminum cap marked:

T4S R3W
C 1/4 S1
1992

60.88

Point for the center N 1/16 section corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with
aluminum cap marked:

C
N 1/16 | S1
C
1992

Corner is located 80 lks. west of a fence which bears north and south.

81.51

The 1/4 section corner of sections 1 and 36 on the north boundary of the Tp.,
hereinbefore described.

From the 1/4 section corner of sections 1 and 6 on the east boundary of the Tp.,
hereinbefore described.

West, on the E-W center line of section 1.

20.14

Point for the center E 1/16 section corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with
aluminum cap marked:

THE SUBDIVISION OF SECTION 1,
T. 4 S., R. 3 W., USM, UTAH

CHAINS

C $\frac{E \ 1/16}{S1}$ C
1992

Corner is located 40 lks. south of a fence which bears east and west and 40 lks. west of the center line of a road which bears north and south.

40.28 The center 1/4 section corner.

60.475 Point for the center W 1/16 section corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, in a collar of stone, with aluminum cap marked:

C $\frac{W \ 1/16}{S1}$ C
1992

Corner is located 50 lks. south and 90 lks. west of the corner of fences projecting south and east.

80.67 The 1/4 section corner of sections 1 and 2.

From the center E 1/16 section corner.

N. 0° 57' W., on the N-S center line of the NE 1/4.

20.35 Point for the NE 1/16 section corner at intersection with the E-W center line of the NE 1/4.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

NE 1/16 S1
1992

40.82 The E 1/16 section corner of sections 1 and 36 on the north boundary of the Tp., hereinbefore described.

From the N 1/16 section corner of section 1 only, on the east boundary of the Tp., hereinbefore described.

N. 89° 54' W., on the E-W center line of the NE 1/4.

20.215 The NE 1/16 section corner.

40.43 The center N 1/16 section corner.

THE SUBDIVISION OF SECTION 1,
T. 4 S., R. 3 W., USM, UTAH

CHAINS

From the W 1/16 section corner of sections 1 and 12.

N. $1^{\circ} 09'$ W., on the N-S center line of the SW 1/4 of section 1.

40.61

The center W 1/16 section corner.

N. $1^{\circ} 03'$ W., on the N-S center line of the NW 1/4.

20.47

Point for the NW 1/16 section corner at intersection with the E-W center line of the NW 1/4.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, in a collar of stone, with aluminum cap marked:

NW 1/16 S1
1992

Corner is located 45 lks. north of the corner of fences projecting west and northeast.

41.10

The W 1/16 section corner of sections 1 and 36 on the north boundary of the Tp., hereinbefore described.

From the center N 1/16 section corner.

N. $89^{\circ} 47'$ W., on the E-W center line of the NW 1/4.

20.16

The NW 1/16 section corner.

40.33

The N 1/16 section corner of sections 1 and 2.

The Subdivision of Section 2,
T. 4 S., R. 3 W., USM, Utah

From the 1/4 section corner of sections 2 and 11.

N. $0^{\circ} 46'$ W., on the N-S center line of section 2.

20.28

Point for the center S 1/6 section corner falls in a slough near the south bank of the Duchesne River; not monumented.

40.56

Point for the center 1/4 section corner at intersection with the E-W center line.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

THE SUBDIVISION OF SECTION 2,
T. 4 S., R. 3 W., USM, UTAH

CHAINS

T4S R3W
C 1/4 S2
1992

Raise a mound of stone west of the corner.

Corner is located 40 lks. north and 60 lks. east of the corner of fences projecting north, south and west.

80.96 The 1/4 section corner of sections 2 and 35 on the north boundary of the Tp., monumented with a nail and washer set in the surface of a road which bears east and west; this is accepted as a careful and faithful reestablishment of the corner position.

From the 1/4 section corner of sections 1 and 2.

N. 89° 06' W., on the E-W center line of section 2.

20.035 Point for the center E 1/16 section corner; not monumented.

40.07 The center 1/4 section corner.

80.30 The 1/4 section corner of sections 2 and 3.

From the E 1/16 section corner of sections 2 and 11.

N. 0° 55' W., on the N-S center line of the SE 1/4 of section 2.

20.155 Point for the SE 1/16 section corner at intersection with the E-W center line of the SE 1/4.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a steel fence post driven 5 ft. in the ground, with aluminum cap marked:

SE 1/16 S2
1992

40.31 The point for the center E 1/16 section corner.

From the S 1/16 section corner of sections 1 and 2.

N. 89° 28' W., on the E-W center line of the SE 1/4 of section 2.

20.085 The SE 1/16 section corner.

40.17 The point for the center S 1/16 section corner.

THE SUBDIVISION OF SECTION 3,
T. 4 S., R. 3 W., USM, UTAH

CHAINS

The Subdivision of Section 3,
T. 4 S., R. 3 W., USM, Utah

From the 1/4 section corner of sections 3 and 10.

N. $0^{\circ} 44'$ W., on the N-S center line of section 3.

20.21 Point for the center S 1/16 section corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 30 ins. in the ground, in an alfalfa field, with aluminum cap marked:

C
S 1/16 | S3
C
1992

Deposit a magnet at base of the aluminum post.

Corner is located 30 lks. south and 100 lks. east of the corner of fences projecting north, south and west.

40.42 Point for the center 1/4 section corner at intersection with the E-W center line falls in a gravel bar on the south bank of the Duchesne River; not monumented.

80.44 The 1/4 section corner of sections 3 and 34 on the north boundary of the Tp., monumented with a nail and washer set in the surface of a road which bears east and west; this is accepted as a careful and faithful reestablishment of the corner position.

From the 1/4 section corner of sections 2 and 3.

S. $88^{\circ} 59'$ W., on the E-W center line of section 3.

20.025 Point for the center E 1/16 section corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

C — E 1/16 — C
S3
1992

40.05 The point for the center 1/4 section corner.

80.12 The point for the 1/4 section corner of section 3 and 4.

THE SUBDIVISION OF SECTION 3,
T. 4 S., R. 3 W., USM, UTAH

CHAINS

From the E 1/16 section corner of section corner of sections 3 and 10.

N. $0^{\circ} 43' W.$, on the N-S center line of the SE 1/4 of section 3.

20.37

Point for the SE 1/16 section corner at intersection with the E-W center line of the SE 1/4.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

SE 1/16 S3
1992

Corner is located 15 lks. west of a fence which bears north and south.

40.74

The center E 1/16 section corner.

From the true point for the S 1/16 section corner of sections 2 and 3.

S. $89^{\circ} 27' W.$, on the E-W center line of the SE 1/4 of section 3.

7.00

Point selected for the witness corner to the S 1/16 section corner of sections 2 and 3.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

WC
S 1/16
S3 | S2 →
1992

Raise a mound of stone north of the corner.

Corner is located 20 lks. west of the bank of a slough and 50 lks. south of a fence which bears northeast and southwest.

20.015

The SE 1/16 section corner.

40.03

The center S 1/16 section corner.

S. $89^{\circ} 27' W.$, on the E-W center line of the SW 1/4.

40.05

The S 1/16 section corner of sections 3 and 4.

THE SUBDIVISION OF SECTION 4,
T. 4 S., R. 3 W., USM, UTAH

CHAINS

The Subdivision of Section 4,
T. 4 S., R. 3 W., USM, Utah

From the point for the 1/4 section corner of sections 4 and 9.

N. 0° 28' W., on the N-S center line of section 4.

19.835 Point for the center S 1/16 section corner; not monumented.

39.67 Point for the center 1/4 section corner at intersection with the E-W center line; not monumented.

80.05 The 1/4 section corner of sections 4 and 33 on the north boundary of the Tp., monumented with an aluminum post, 2 1/2 ins., diam., set in a mound of stone, with Duchesne County Survey aluminum cap marked: T3S R3W 1/4 S4 S33 T4S 1990; this is accepted as a careful and faithful remonumentation of the original corner.

From the point for the 1/4 section corner of sections 3 and 4.

S. 89° 48' W., on the E-W center line of section 4.

19.86 Point for the center E 1/16 section corner; not monumented.

39.72 The point for the center 1/4 section corner.

79.71 The 1/4 section corner of sections 4 and 5, monumented with an aluminum post, 2 1/2 ins. diam., set over a steel fence post in a marshy area, with Duchesne County Survey aluminum cap marked: T4S R3W 1/4 S4 S5 1990; this is accepted as a careful and faithful reestablishment of the corner position.

From the E 1/16 section corner of sections 4 and 9.

N. 0° 38' W., on the N-S center line of the SE 1/4 of section 4.

19.855 Point for the SE 1/16 section corner at intersection with the E-W center line of the SE 1/4.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

SE 1/16 S4
1992

Corner is located N. 69° 40'E., 3.30 chs. dist., from the corner of fences projecting south and east.

THE SUBDIVISION OF SECTION 4,
T. 4 S., R. 3 W., USM, UTAH

CHAINS
39.71

The point for the center E 1/16 section corner.

From the S 1/16 section corner of sections 3 and 4.

S. 89° 52' W., on the E-W center line of the SE 1/4 of section 4.

19.92

The SE 1/16 section corner.

39.84

The point for the center S 1/16 section corner.

The Subdivision of Section 6,
T. 4 S., R. 3 W., USM, Utah

From the 1/4 section corner of sections 6 and 7, monumented with a sandstone, 12x8x4 ins., marked with the letter A on top, and a mound of stone north of the corner.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

T4S R3W
1/4 $\frac{S6}{S7}$
1992

Deposit the marked stone alongside the aluminum post.

Raise a mound of stone north of the corner.

N. 0° 16' W., on the N-S center line of section 6.

39.80

Point for the center 1/4 section corner at intersection with the E-W center line; not monumented.

77.58

The 1/4 section corner of sections 6 and 31 on the north boundary of the Tp., hereinbefore described.

From the point for the 1/4 section corner of sections 5 and 6.

N. 88° 12' W., on the E-W center line of section 6.

39.73

The point for the center 1/4 section corner.

59.61

Point for the center W 1/16 section corner.

THE SUBDIVISION OF SECTION 6,
T. 4 S., R. 3 W., USM, UTAH

CHAINS

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

$$C \frac{W \frac{1}{16}}{S6} C$$

1992

Corner is located 50 lks. south of a fence which bears east and west.

85.16

The 1/4 section corner of sections 1 and 6 on the west boundary of the Tp., hereinbefore described.

From the center W 1/16 section corner.

N. 0° 05' W., on the N-S center line of the NW 1/4.

36.94

The W 1/16 section corner of sections 6 and 31 on the north boundary of the Tp., hereinbefore described.

The Subdivision of Section 9,
T. 4 S., R. 3 W., USM, Utah

From the 1/4 section corner of sections 9 and 16, monumented with a sandstone, 14x10x8 ins., marked 1/4 on the west face, set in a mound of stone.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

$$T4S \ R3W$$

$$1/4 \ \frac{S9}{S16}$$

1992

Deposit the marked stone alongside the aluminum post.

Raise a mound of stone north of the corner.

N. 0° 12' W., on the N-S center line of section 9.

38.94

Point for the center 1/4 section corner at intersection with the E-W center line; not monumented.

78.93

The point for the 1/4 section corner of sections 4 and 9.

THE SUBDIVISION OF SECTION 9,
T. 4 S., R. 3 W., USM, UTAH

CHAINS

From the 1/4 section corner of sections 9 and 10.

S. 89° 43' W., on the E-W center line of section 9.

19.74

Point for the center E 1/16 section corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

$$C \frac{E \ 1/16}{S9} C$$

1992

Corner is located 5 lks. south and 10 lks. west of the corner of fences projecting east, west and south.

39.48

The point for the center 1/4 section corner.

59.43

The center W 1/16 section corner, monumented with an aluminum post, 2 1/2 ins., diam., set in a mound of stone, with Duchesne County Survey aluminum cap marked: T4S R3W W1/16 S9 1985; this is accepted as a careful and faithful remonumentation of the original corner.

From the center E 1/16 section corner.

N. 0° 08' E., on the N-S center line of the NE 1/4.

39.92

The E 1/16 section corner of sections 4 and 9.

The Subdivision of Section 10,
T. 4 S., R. 3 W., USM, Utah

From the 1/4 section corner of sections 10 and 15, monumented with a sandstone, 16x10x8 ins., no marks visible, set in a mound of stone.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

$$T4S \ R3W$$

$$1/4 \ \frac{S10}{S15}$$

1992

Deposit the sandstone monument alongside the aluminum post.

Corner is located at the corner of fences projecting north, south and east.

THE SUBDIVISION OF SECTION 10,
T. 4 S., R. 3 W., USM, UTAH

CHAINS

North, on the N-S center line of section 10.

39.91

Point for the center 1/4 section corner at intersection with the E-W center line.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

T4S R3W
C 1/4 S10
1992

Deposit a magnet at base and a steel fence post alongside aluminum post.

Corner is located in an alfalfa field 100 lks. south of the center line of a road which bears east and west.

80.05

The 1/4 section corner of sections 3 and 10.

From the 1/4 section corner of sections 10 and 11.

N. 89° 39' W., on the E-W center line of section 10.

19.97

Point for the center E 1/16 section corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

C $\frac{E\ 1/16}{S10}$ C
1992

Corner is located 20 lks. south of the center line of a road which bears east and west.

39.94

The center 1/4 section corner.

80.30

The 1/4 section corner of sections 9 and 10.

From the center E 1/16 section corner.

N. 0° 04' E., on the N-S center line of the NE 1/4.

40.29

The E 1/16 section corner of sections 3 and 10.

The Subdivision of Section 11,
T. 4 S., R. 3 W., USM, Utah

THE SUBDIVISION OF SECTION 11,
T. 4 S., R. 3 W., USM, UTAH

CHAINS

From the point for the center 1/4 section corner of section 11, determined at the projected intersection of the east right-of-way fence of a road which bears north and south with the center line of a road which bears east and west; this position is harmoniously related to surrounding identified corners.

Set a spike flush with the surface of the road.

from which

An aluminum post, 30 ins. long, 2 1/2 ins. diam., set 24 ins. in the ground for a reference monument, with aluminum cap marked: RM C 1/4 S11 1992 45 FT and an arrow pointing to the corner, bears S. 45° 08' E., 68.2 lks. dist.

A nail and bottle cap driven in a blazed cottonwood, 72 ins. diam., bears N. 44° 52' E., 73.5 lks. dist.; cottonwood is scribed C 1/4 S11 BT.

A nail and bottle cap driven in a power pole, bears S. 52° 52' W., 83.6 lks. dist.

A nail and bottle cap driven in a guy pole, bears N. 58° 08' W., 81.2 lks. dist.

N. 0° 06' W., on the N-S center line of section 11.

20.135 Point for the center N 1/16 section corner.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with aluminum cap marked:

C
N 1/16 | S11
C
1992

40.27 The 1/4 section corner of sections 2 and 11.

From the 1/4 section corner of sections 11 and 12.

S. 89° 52' W., on the E-W center line of section 11.

20.21 Point for the center E 1/16 section corner falls in a road which bears east and west.

Set a spike flush with the surface of the road.

from which

THE SUBDIVISION OF SECTION 11,
T. 4 S., R. 3 W., USM, UTAH

CHAINS

An aluminum post, 30 ins. long, 2 1/2 ins. diam., set 24 ins. in the ground for a reference monument, with aluminum cap marked: RM CE 1/16 S11 1992 40 FT and an arrow pointing to the corner, bears S. 44° 52' W., 60.6 lks. dist.

An aluminum post, 30 ins. long, 2 1/2 ins. diam., set 24 ins. in the ground for a reference monument, with aluminum cap marked: RM CE 1/16 S11 1992 40 FT and an arrow pointing to the corner, bears N. 45° 08' W., 60.6 lks. dist.

40.42 The center 1/4 section corner.

S. 89° 55' W., beginning new measurement.

20.22 Point for the center W 1/16 section corner; not monumented.

40.44 The 1/4 section corner of sections 10 and 11.

From the center E 1/16 section corner.

N. 0° 12' W., on the N-S center line of the NE 1/4.

40.16 The E 1/16 section corner of sections 2 and 11.

From the E 1/16 section corner of sections 11 and 14.

N. 0° 17' E., on the N-S center line of the SE 1/4 of section 11.

39.90 The center E 1/16 section corner.

From the point for the center W 1/16 section corner.

N. 0° 01' E., on the N-S center line of the NW 1/4.

20.175 Point for the NW 1/16 section corner at intersection with the E-W center line of the NW 1/4.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

NW 1/16 S11
1992

Corner is located 70 lks. east of the corner of fences projecting north, south, east and west.

40.35 The W 1/16 section corner of sections 2 and 11.

THE SUBDIVISION OF SECTION 11,
T. 4 S., R. 3 W., USM, UTAH

CHAINS

From the center N 1/16 section corner.

N. $89^{\circ} 58'$ W., on the E-W center line of the NW 1/4.

20.175 The NW 1/16 section corner.

40.35 The N 1/16 section corner of sections 10 and 11.

The Subdivision of Section 12,
T. 4 S., R. 3 W., USM, Utah.

From the point for the center N 1/16 section corner, determined at midpoint between the corner of fences projecting north, east and west and the corner of fences projecting south, east and west; this position is harmoniously related to surrounding identified corners.

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a steel fence post driven 5 ft. in the ground, with aluminum cap marked:

C
N 1/16 | S12
C
1992

N. $0^{\circ} 21'$ E., on the N-S center line of section 12.

19.48 The 1/4 section corner of sections 1 and 12.

From the point for the center W 1/16 section corner, determined at the projected intersection of a fence which bears north and south and the center line of a road which bears east and west; this position is harmoniously related to surrounding identified corners.

Set a spike flush with the surface of the road.

from which

An aluminum post, 30 ins. long, 2 1/2 ins. diam., set 24 ins. in the ground for a reference monument, with aluminum cap marked: RM CW 1/16 S12 1992 33 FT and an arrow pointing to the corner, bears S. $44^{\circ} 42'$ E., 50 lks. dist.

An aluminum post, 30 ins. long, 2 1/2 ins. diam., set 24 ins. in the ground for a reference monument, with aluminum cap marked: RM CW 1/16 S12 1992 33 FT and an arrow pointing to the corner, bears S. $45^{\circ} 18'$ W., 50 lks. dist.

S. $89^{\circ} 55'$ W., on the E-W center line of section 12.

THE SUBDIVISION OF SECTION 12,
T. 4 S., R. 3 W., USM, UTAH

CHAINS
19.97

The 1/4 section corner of sections 11 and 12.

From the point for the NE 1/16 section corner, determined at the projected intersection of a fence which projects west with the center line of a road which bears north and south; this position is harmoniously related to surrounding identified corners.

Set a spike flush with the surface of the road.

from which

An aluminum post, 30 ins. long, 2 1/2 ins. diam., set 24 ins. in the ground for a reference monument, with aluminum cap marked: RM NE 1/16 S12 1992 37 FT and an arrow pointing to the corner, bears N. $44^{\circ} 32'$ E., 56 lks. dist.

An aluminum post, 30 ins. long, 2 1/2 ins. diam., set 24 ins. in the ground for a reference monument, with aluminum cap marked: RM NE 1/16 S12 1992 37 FT and an arrow pointing to the corner, bears S. $45^{\circ} 28'$ E., 56 lks. dist.

N. $0^{\circ} 11'$ W., on the N-S center line of the NE 1/4.

19.52

The E 1/16 section corner of sections 1 and 12.

From the NE 1/16 section corner.

N. $89^{\circ} 59'$ W., on the E-W center line of the NE 1/4.

20.06

The center N 1/16 section corner.

From the W 1/16 section corner of sections 12 and 13.

N. $0^{\circ} 18'$ E., on the N-S center line of the SW 1/4.

39.71

The center W 1/16 section corner.

N. $0^{\circ} 12'$ E., on the N-S center line of the NW 1/4.

20.12

The NW 1/16 section corner, determined at the corner of fences projecting north, south, east and west; this position is harmoniously related to surrounding identified corners.

At the corner point

Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with aluminum cap marked:

THE SUBDIVISION OF SECTION 12,
T. 4 S., R. 3 W., USM, UTAH

CHAINS

NW 1/16 S12
1992

N. $0^{\circ} 02'$ E., beginning new measurement.

19.35 The W 1/16 section corner of sections 1 and 12.

From the center N 1/16 section corner.

N $89^{\circ} 59'$ W., on the E-W center line of the NW 1/4.

20.10 The NW 1/16 section corner.

N $89^{\circ} 59'$ W., beginning new measurement.

20.10 The N 1/16 section corner of sections 11 and 12.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

Name	Capacity
Joseph M. Dhaenens	Surveying Technician


CERTIFICATE OF SURVEY

I, *Richard A. Zaninovich, Cadastral Surveyor*, hereby certify upon honor that, in pursuance of special instructions bearing the date of the *9th day of April, 1992, and Supplemental Special Instructions dated July 6, 1992*, I have *dependently resurveyed portions of the north, east and west boundaries and subdivisional lines, and subdivided certain sections, in Township 4 South, Range 3 West*,

of the *Uintah Special Meridian*, in the State of *Utah*, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

8-26-94

Date

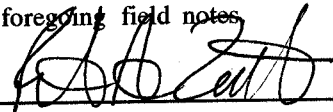

(Cadastral Surveyor)

Date

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Salt Lake City, Utah


The foregoing field notes of the *dependent resurvey of portions of north, east and west boundaries and subdivisional lines and the subdivision of certain sections in Township 4 South, Range 3 West, Uintah Special Meridian, Utah*,

executed by *Richard A. Zaninovich, Cadastral Surveyor*

having been critically examined and found correct, are hereby approved.

November 23, 1994

Date



(Chief Cadastral Surveyor, Utah)